

MiVoice Office Real-Time Dashboard Quick Reference Guide

MARCH 2021

DOCUMENT RELEASE 5.2

QUICK REFERENCE GUIDE



NOTICE

The information contained in this document is believed to be accurate in all respects but is not warranted by Mitel Networks™ Corporation (MITEL®). The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes.

No part of this document can be reproduced or transmitted in any form or by any means - electronic or mechanical - for any purpose without written permission from Mitel Networks Corporation.

TRADEMARKS

The trademarks, service marks, logos and graphics (collectively "Trademarks") appearing on Mitel's Internet sites or in its publications are registered and unregistered trademarks of Mitel Networks Corporation (MNC) or its subsidiaries (collectively "Mitel") or others. Use of the Trademarks is prohibited without the express consent from Mitel. Please contact our legal department at legal@mitel.com for additional information. For a list of the worldwide Mitel Networks Corporation registered trademarks, please refer to the website: <http://www.mitel.com/trademarks>.

Windows and Microsoft are trademarks of Microsoft Corporation.

Other product names mentioned in this document may be trademarks of their respective companies and are hereby acknowledged.

MiVoice Office Application Suite
Release 5.2 - March, 2021

®,™ Trademark of Mitel Networks Corporation
© Copyright 2021 Mitel Networks Corporation All rights reserved

Real-Time Dashboard Quick Reference Guide

The following guide is designed to provide an introduction to the core features of the Real-Time Dashboard.

Dashboard UI

The webpage provides real-time visibility of calls, do-not-disturb status* and agent status* on the telephone system. By default, a standard view containing some commonly used statistics are added on first login to the dashboard. This view can then be customized with a variety of tiles which can be filtered as required. The dashboard provides the following types:

- Single Statistic
- Multi-Statistic
- Media (Video/Images)
- Ticker
- Grid (Agent, Call, Extension & Trunk)

* Agent & DND visibility require additional licensing.

A Dashboard can have multiple views configured by the user, they can then switch between the views via the dropdown box.

Edit Dashboard
Edit/Switch Dashboard: Switch between views, create new views or edit existing ones

Dashboard Filter
Apply a filter to the entire Dashboard

Agent Grid
See grids of Agents/Extensions /Calls. Perform call & status control operations

Edit Tile
Edit an existing tile. Change the data, filter, appearance or add/edit an alarm

Edit Mode
Enable edit mode to add new tiles or move/resize existing tiles

Ticker
Shows multiple statistics and can be located at the top or bottom of the screen

Single Statistic Tile
Show any available statistic with custom colours

Circular
Show a statistic with a representation of % complete

Manual/External Statistics
Manually enter data to be displayed or query data to be displayed from an external source

The dashboard displays the following statistics:

- 5** Calls Ringing
- 00:27:55** Total Call Time
- 0** Calls Internal
- 5** Calls Out External
- 10** Agents Free
- 7** Calls External
- 1** Calls Lost
- £100,000** Sales Target

The Agents table shows the following data:

Agent	Agent Name	Time L.	ACD Status	DND Mess.	Hunt Groups	Time In	Time On	Ca.	Calls O.	Avg Talk Ti.	Total Talk...
7012	Charles Ryan	02:30:16	Busy N/A	ON A TRIP	2202,2230	00:4	05:22:49	0	6	00:00:00	00:00:00
7013	Alice Craig	02:30:16	Busy N/A	ON HOLID.	2002,2007	02:3	05:22:49	0	6	00:00:00	00:00:00
7014	Mark Lloyd	02:30:16	Busy N/A	GONE HO.	2202,2230	02:3	05:22:49	0	6	00:00:00	00:00:00
7015	Frankie Williams	02:30:16	Busy N/A	OUT OF O.	2002,2007	02:3	05:22:49	0	6	00:00:00	00:00:00
7016	Julia Phillips	02:30:16	Busy		2211,2201	02:3	05:22:49	0	6	00:00:00	00:00:00
7017	Wayne Gernson	01:36:08	Busy		2211,2201	00:0	01:36:06	0	6	00:04:38	00:04:38
7018	John Goldsmith	02:30:16	Busy		2211,2201	00:0	05:22:49	0	6	00:04:38	00:04:38
7019	Terry Baker	02:30:16	Free		2202	02:3	05:22:49	0	6	00:00:00	00:00:00
7020	Sam Bagley		Free		2211,2201	00:1	05:34:28	0	6	00:00:00	00:00:00
7021	Oliver Marks	01:07:57	Free		2002,2202	00:0	01:07:55	0	6	00:00:00	00:00:00
7022	Garry Taylor	02:30:16	Free		2002,2007	00:1	05:22:49	0	6	00:00:00	00:00:00
7023	Bruce Dawson	02:30:16	Free		2002,2007	00:3	05:22:49	0	6	00:00:00	00:00:00

Single & Circular Statistic Tiles

Choose a single statistic from the call, DND & agent field options. The foreground & background colours of

the tiles will be selected randomly by the wallboard (dependant on the default option chosen) but can be changed as required. Optionally, the appearance of a single statistic tile can be changed to show a circular gauge displaying the % of a target value.

Multi-Statistic Tiles

These tiles display similar information as single statistics tiles but can display multiple statistics at once, or cycle through multiple statistics. Each statistic added can have a different appearance to help distinguish between them.

Media Tiles

These tiles can display images, live streaming video from live feeds or display an uploaded video file on a loop. Audio from videos can be turned on or off.

Ticker

The ticker can be used to show up to 20 different statistics that loop round the screen. As with the multi-statistic tiles, each statistic added to the ticker can be given a different appearance to help distinguish between them.

 Only one ticker can be added to a Real-Time Dashboard view. It can either be located at the top or bottom of the view and has various options for size and speed.

Grid

Grid tiles provide real-time information about specific devices/calls rather than system wide. Grids are provided for agents, calls, extensions & trunks. In addition to summarised and current status information, grids provide third party control over other calls/device. Change an agent's ACD or DND status or move/steal telephone calls. To access the call/status control menu, left-click on the status icon at the far left of a row or the more icon (⋮) at the far right.

Full Screen

The full screen mode can be toggled* using the icon provided. When enabled, the browser frame/toolbar and the website title bar are removed so that the the dashboard fills as much of the screen as possible.

** Full Screen mode is not supported in all browsers*

Manual/External Statistics

If required, manually added data (Global Variables) or data from external databases can be displayed on any of the tiles. This is useful for displaying general information to users such as sales targets, promotions, support information etc.

 Global Variables are edited in the configuration section (⚙️) of the website. This will only be available with the correct permissions.

 There is an additional licence for enabling external data sources.

Dashboard Edit Quick Reference Guide

The following guide is designed to provide an introduction to the core features of the Real-Time Dashboard.

View Settings

The dashboard provides real-time visibility of calls, extensions* and agents* on the telephone system. Each user can customise multiple views with a variety of tiles which can be filtered as required.

The screenshot shows the 'Edit View' dialog box. At the top, there is a blue header bar with the title 'Edit View' on the left and 'Cancel' and 'Save' buttons on the right. Below the header, there is a 'Name' field with the text 'Default Wallboard'. Underneath, there are two sections: 'Display Mode' and 'Colour Mode'. The 'Display Mode' section has two radio buttons: 'Uniform Grid (fill available space)' (selected) and 'Manual Sizing'. The 'Colour Mode' section has three radio buttons: 'Coloured Background' (selected), 'Coloured Text', and 'No Colour'. To the right of the 'Display Mode' section, there is a blue heading 'Display Mode' followed by the text 'Switch between automatically sized tiles or manually sized tiles.' and a note: 'Note: size and location information is lost when switching between modes'. A blue arrow points from this text to the 'Display Mode' radio buttons. Similarly, to the right of the 'Colour Mode' section, there is a blue heading 'Colour Mode' followed by the text 'Select the default colour mode when adding new tiles to the wallboard'. A blue arrow points from this text to the 'Colour Mode' radio buttons.

Display Mode

The display mode can be set to either 'Uniform Grid' (default) or 'Manual Sizing'. When uniform grid is enabled, the tiles on the wallboard will automatically resize as tiles are added or removed, simplifying the setup of the wallboard. When manual sizing is enabled, each tile must be individually located and sized. The benefit of manual sizing is that tiles can be different sizes if required.

 Switching between display modes will cause the tile location and sizing to be lost.

Colour Mode


The colour mode can be set to either 'Coloured Background' (default), 'Coloured Text' or 'No Colour' (black and white). When coloured background is selected, each new tile added will be given a randomly selected background colour with white text (recommended for viewing from a distance). When coloured text is selected, each new tile added is given a randomly selected foreground colour with a white background (recommended for viewing close up). When 'No Colour' is selected, each new tile added is given a white background with black text.



The colour mode only affects new tiles that are added to the view. Existing tiles' background/foreground colour must be changed manually.

Edit Mode

To add new tiles or move/resize existing tiles, edit mode must be enabled. Press the edit (✎) icon on the top right-hand side of the view to enter edit mode. Once enabled the plus (+) icon can be used to add new tiles to the view. When pressed, the 'Add Tile' form is displayed, providing a choice between the different types of tiles available. Additionally, while in edit mode any existing tiles can be moved or resized (when using manual display mode). Press the tick (✓) icon to exit edit mode.

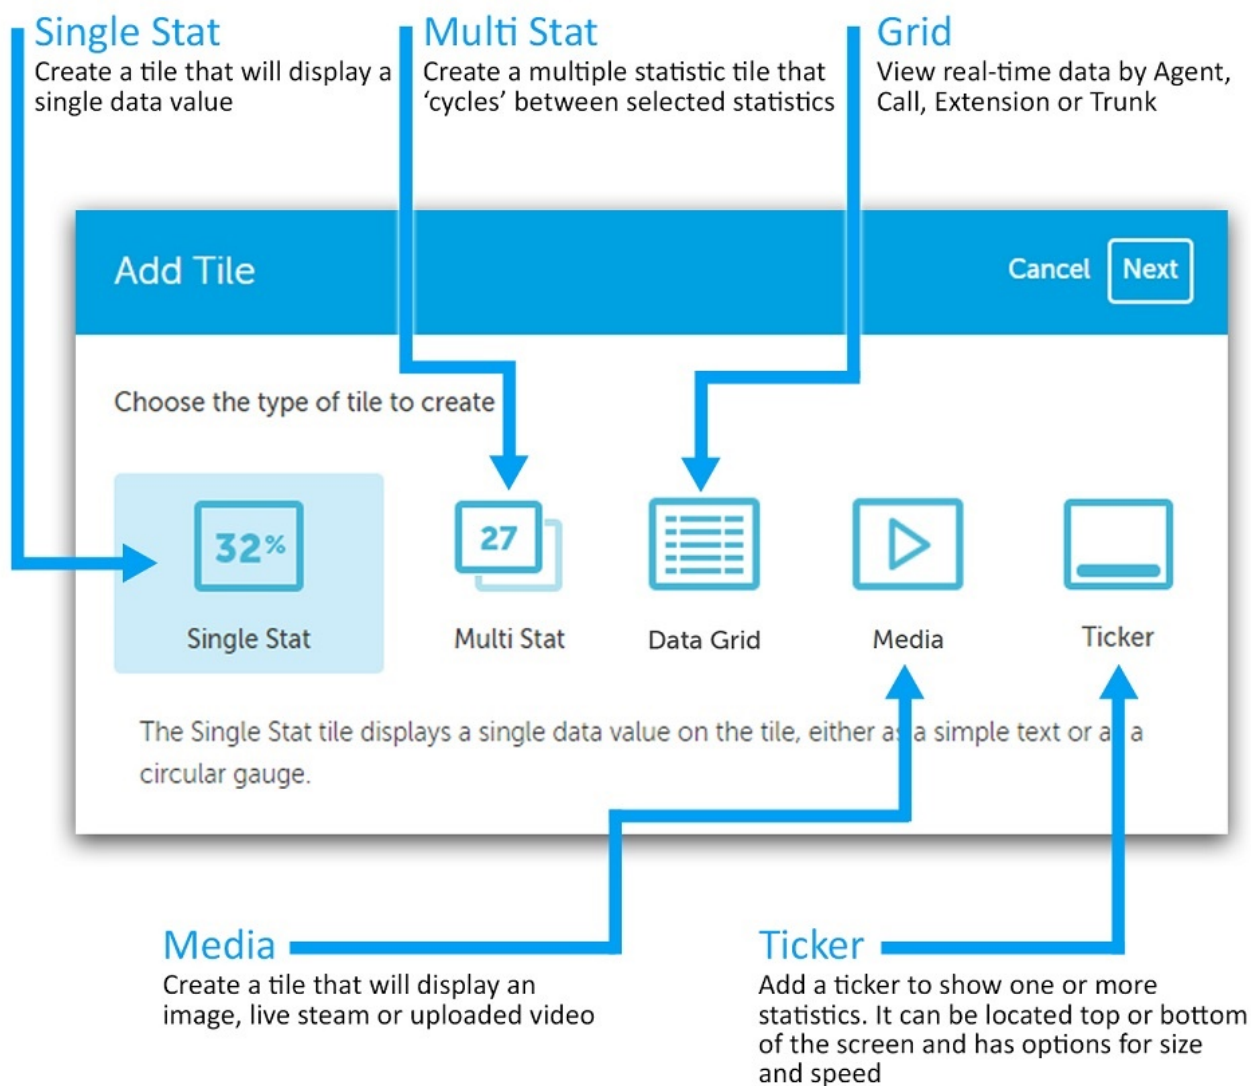

Once the tile type has been selected, press the 'Next' button to view the tile properties form.



Only one ticker is allowed per Dashboard view. If there is already a ticker added, the ticker tile will not appear when adding new tiles.

Tiles Properties

Each tile has a set of properties so that it can be customised. The properties available will differ depending on the type of tile being edited/added. The image below shows the property form based on a single statistic tile.

Alarms
Add alarms for any of the statistics on the tile. Alarms can be used to flash tiles, make the full screen or change the colour

Appearance
Change the background and Foreground colour of the tile. For 'Cycling' tiles, the % value can be configured here

Title
Enter the name that will displayed at the top of the tile

Pick Fields
Select one or more data fields to add to the tile

Filter
Configure which filter should be used on the tile

Filter Mode
Should the filter be combined with the Wallboard filter or replace it?

The 'Edit Tile' form includes tabs for Config, Appearance, and Alarms. The 'Config' tab is active, showing fields for Title (Total Call Time), Fields to Display (Total Call Time with a red X), a Pick Field button, a Filter dropdown (No Filter), and Filter Mode (Combine with view filter selected, Replace view filter unselected).

Title & Fields

The title will be displayed at the top of the tile. By default, this will be set to the name of the data field selected, but can be changed. To add fields to a tile, press the 'Pick Field' button and then select the required field from the context menu. To aid selection, the fields have been grouped together into categories.

For more information on the fields available and how they are calculated, please refer to the help file.

Filter & Filter Mode

The data on each tile can be filtered if required. By default no filter is applied. The filter mode is used to select whether the overall Wallboard view filter is applied or not. When set to 'Combined with view filter' (default), any filter set on the Wallboard view will be combined with any filter set on the tile. If set to 'Replace view filter' any filter set on the Wallboard view will be ignored.

To ensure a tile never has a filter set, leave the filter set to 'No Filter' and select 'Replace view filter' as the filter mode.

Appearance

The appearance section provides access to change the foreground/background colour of the tile and also any other display options (such as 'Circular Gauge').

Alarms


Each tile can have one or more alarms configured. Alarms can be used to bring attention to tiles when thresholds are reached or breached. Alarms can be set to do the following:

- Flash the tile
- Make the tile full screen (double-click the tile to revert it back)
- Override the foreground/background colour
- Play a sound file
- Send an email
- Send a tile snap-shot to a 6900 phone

Overriding a tile's foreground and/or background colour is very useful for creating traffic light style tiles. For example, thresholds can be set to change a tiles colour from green to amber to red based on the data field's value. This can be used to help bring attention to specific performance targets.

Configuration

The title bar provides access to areas of the App Suite. The image below outlines each of the navigation icons:

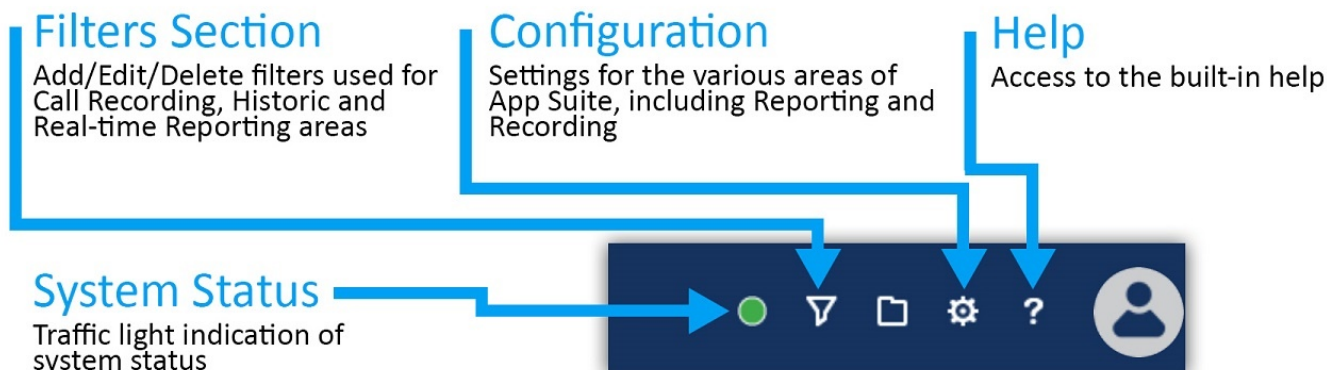


The configuration section and system status will only be visible with the correct permissions.

Filters

The 'Filters' section of the website is used to manage all the saved filters on the system. Filters can be used with reports or recordings.

Each user has their own 'My Filters' section that provides a list of all filters they have created.

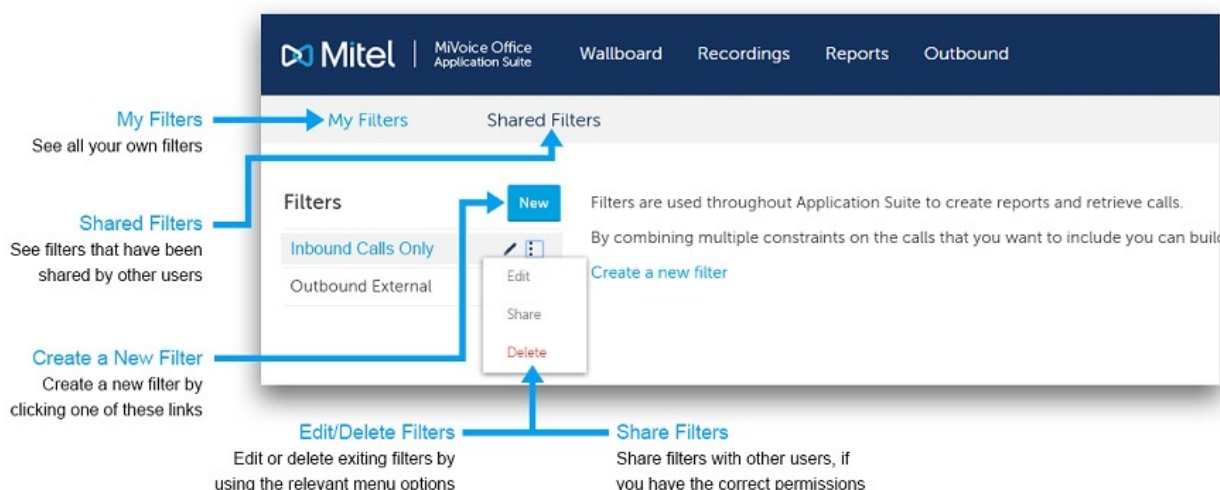

Shared Filters (Permission dependant)

Filters can be shared between users to avoid duplicating work and to allow administrative staff to set up filters that can be used by everyone.

Adding / Editing Filters

Each filter provides the ability to search on one or more details about a call. The details are grouped into tabs. The tabs are displayed with descriptions in the image below:

The diagram illustrates the mapping between filter categories and form fields in a call search interface. Blue arrows connect the category names on the left to the corresponding tabs and input fields on the right.

Details
Give the filter a relevant name

Devices
Search for calls made from or received at different devices on the system (See pattern matching options for more information)

Call Details
Search using specific call details such as Outside Number, Direction, Status, DID/DDI..)

Duration
Search for calls using call, ring or talk time duration

Customer Details
Search for calls using contact name, speed dial name and custom tags

Advanced
Search for specific notes on calls, by call Id or using specific properties such as Trunk to Trunk or Service Codes

The form interface includes the following tabs and fields:

- Tabs:** Details, **Devices**, Call Details, Duration, Customer Details, Advanced. A green **Save** button is located in the top right corner.
- Fields:**
 - Extension:** Linked from **Devices**
 - Extension Name:** Linked from **Devices**
 - Agent ID:** Linked from **Call Details**
 - Agent Name:** Linked from **Call Details**
 - Hunt Group:** Linked from **Duration**
 - Hunt Group Name:** Linked from **Duration**
 - Trunk:** Linked from **Customer Details**

Special Characters

The use of special characters within the text boxes for a [Filter](#) enables the use of complex filter strings.

All Fields

The following characters are supported:

Special Characters	Description
Exclamation mark (!)	Not equal to
Percent (%)	Fuzzy matching (equivalent to a SQL LIKE %)
Underscore (_)	Fuzzy matching of a single character
Comma (,)	Can be used to search for multiple values at the same time

Device Fields

In addition to the special characters above, the following characters are supported when searching using a device based field (Extension, Agent, Trunk, Hunt Group):

Special Characters	Description
Plus sign (+)	Greater than or equal (e.g. 1000+ for extensions greater than or equal to 1000)
Hyphen (-)	Delimits a range of values to match (e.g. 1000-2000 for all extensions between 1000 and 2000 inclusive) or less than or equal to (e.g. -1000 for extensions less than or equal to 1000)

The example below shows what would be matched when entering combining multiple special characters using a comma:

- 1000-1005,!1003,1040,18%5,2000+

Matching endpoints: 1000, 1001, 1002, 1004, 1005, 1040, any that start with 18 and end with a 5, any with a value greater or equal to 2000.



Device numbers are stored as text so when using greater than or less than, it is compared on an alphabetic level not a numeric level



mitel.com

© Copyright 2021, Mitel Networks Corporation. All Rights Reserved. The Mitel word and logo are trademarks of Mitel Networks Corporation. Any reference to third party trademarks are for reference only and Mitel makes no representation of ownership of these marks.