


TUI Variant for UC Suite

Internal call to voicemail box

- Call voicemail box (e.g., 351).

External call to voicemail box

- Call voicemail box (e.g., +49 89 1234-351)
- Enter office number and password.

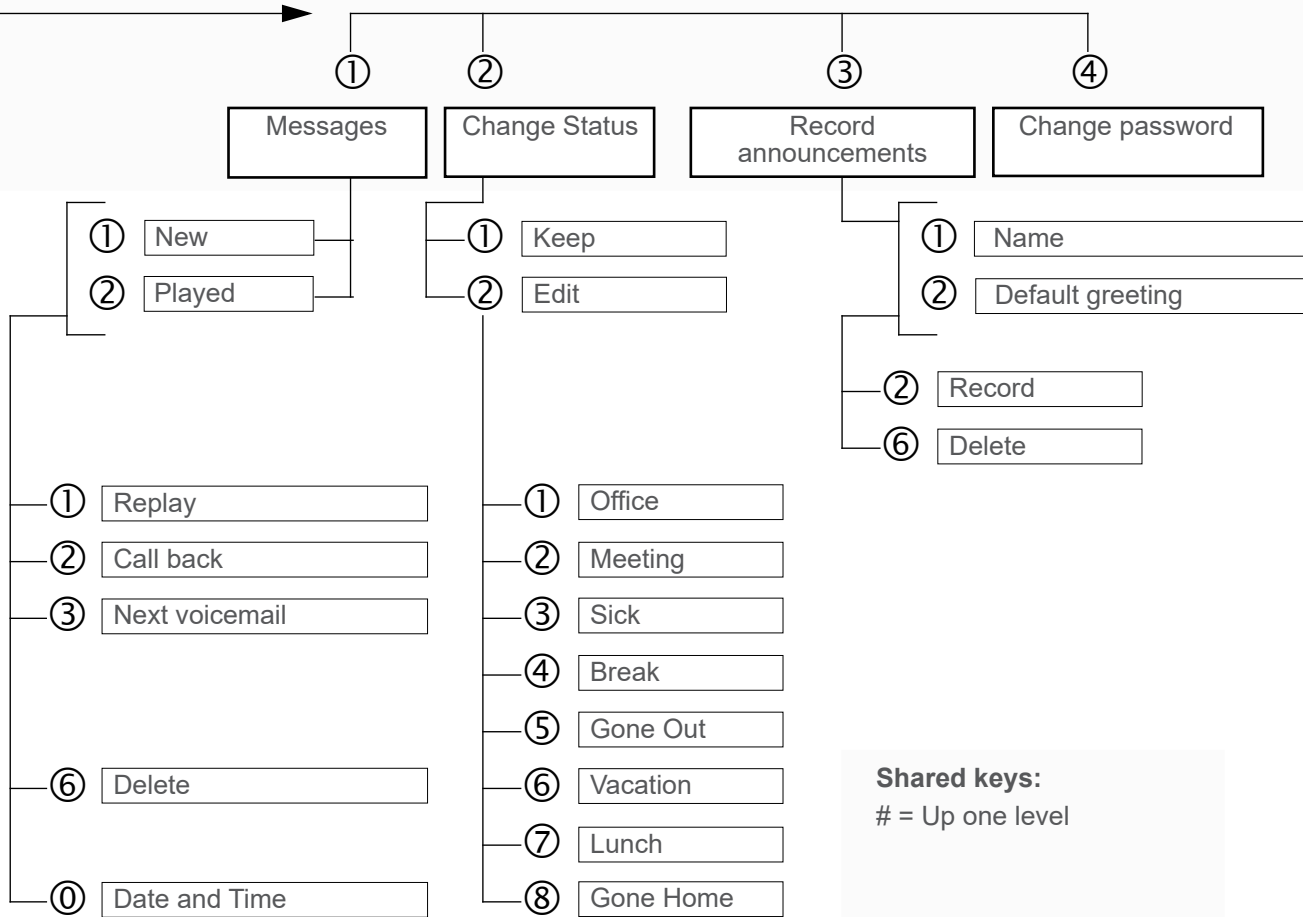

After selecting the status (except for Office), the user is prompted to enter the date/time until which the status should apply (# to cancel input)

Shared keys:
= Up one level

UC Smart Telephone User Interface (TUI)

Kurzbedienungsanleitung

This Quick Start Guide describes the basic functions of the voicemail box and how to use them over the phone. All functions are controlled using the keys on your phone. The voicemail box provides with context-sensitive prompts to assist in the operation. These provide you with information on the possible options available in the current menu.

A31003-P3000-U101-5-7619



05/2024


mitel.com



TUI Variant for Smart VM

Voicemail box with message function

-  : Call voicemail box (e.g., 351 or +49 89 1234-351 from external location)
-  : Enter office number and password if required.

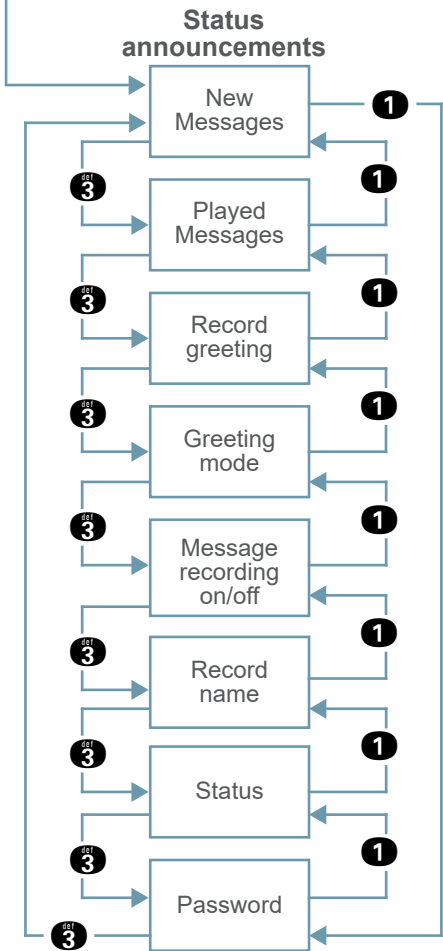

Announcement menu and codes

Messages (new and played)

1	Previous voicemail
2	Repeat voicemail
3	Next voicemail
0	Delete (0 to confirm deletion)
8	Call back
*	Skip all messages, go to Announcement selection

Record greeting

1	Previous status announcement
2	Repeat current greeting
3	Next status announcement
8	Next greeting
0	Record personal greeting or standard greeting (# to stop recording)

Greeting mode

1	Previous status announcement
2	Repeat current mode
3	Next status announcement
8	Switch operation mode ("Manual greeting", "Automatic day/night program", "Automatic by call type" or "No greeting")

Message Recording On/Off

1	Previous status announcement
2	Repeat current message recording
3	Next status announcement
0	Recording on/off

Record name

1	Previous status announcement
2	Repeat current name
3	Next status announcement
0	Record personal name or standard name (# to stop recording)

Status

1	Previous status announcement
2	Repeat current status
3	Next status announcement
8	Change status (Office, Meeting, Sick, Break, Gone Out, Vacation, Lunch, Gone Home)
0	Change return date and time (# to cancel input)

Password

1	Previous status announcement
2	Repeat status announcement
3	Next status announcement
0	Change password (enter password twice)

All items in the announcements menu may not be offered. The offered items will depend on the configuration of the voicemail box and the values set for other items, such as "No greeting".