

Configuration Microsoft SQL Server 2017



Installation manual for system providers

4/7/2020

Product line neo, version 6.x

The described functions can be used with the following ASC products:

EVOIPneo

Please note that you can always find the most up-to-date technical documentation and product updates in the partner area on our website at <http://www.asctechnologies.com>.

Copyright © 2019 ASC Technologies AG. All rights reserved.

Windows is a registered trademark of Microsoft Corporation. VMware® is a registered trademark of VMware, Inc. All other marks and names mentioned herein may be trademarks of their respective companies.

Contents

| | | |
|----------|--|-----------|
| 1 | General information | 4 |
| 2 | Introduction | 5 |
| 3 | Preconditions | 6 |
| 4 | Configure Microsoft SQL Server 2017 | 7 |
| 4.1 | Configure SQL Server Configuration Manager | 7 |
| 4.2 | Install ASC software | 8 |
| 4.3 | Configure database properties | 8 |
| 4.4 | Configure database backup | 11 |
| 4.5 | Configure backup of the transaction log..... | 18 |
| 4.6 | Connection to an AlwaysOn availability group | 18 |
| 5 | Quick guide..... | 20 |
| | List of figures | 21 |
| | List of tables | 22 |
| | Glossary | 23 |

1 General information

In the context of this document ASC represents ASC Technologies AG, its subsidiaries, branch offices, and distributors. An up-to-date overview of the aforementioned entities can be found at <https://www.asctechnologies.com>

ASC assumes no guarantee for the actuality, correctness, integrity or quality of the information provided in the manuals.

ASC regularly checks the content of the released manuals for consistency with the described hardware and software. Nevertheless, deviations cannot be excluded. Necessary revisions are included in subsequent editions.

Some aspects of the ASC technology are described in general terms to protect the ownership and the confidential information or trade secrets of ASC.

The software programs and the manuals of ASC are protected by copyright law. All rights on the manuals are reserved including the rights of reproduction and multiplication of any kind, be it photo mechanical, typographical or on digital data media. This also applies to translations. Copying the manuals, completely or in parts, is only allowed with written authorization of ASC.

Representative, if not defined otherwise, is the technical status at the time of the delivery of the software, the devices and the manuals of ASC. Technical changes without specified announcements are reserved. Previous manuals lose their validity.

The general conditions of sales and delivery of ASC in their latest version apply.

2 Introduction

This document describes the configuration of Microsoft SQL Server 2017 for the EVOIP_{neo} software.



For Microsoft SQL databases, we support the high-availability AlwaysOn Failover Cluster Instances and AlwaysOn Availability Groups. The MS SQL functionality *Dynamic Ports* is not supported for always-on.

Configure the failover operation according to the manual of the manufacturer.



For Microsoft SQL databases, we support connections to cluster instances which can be reached by means of an IP address. Primary and failover database nodes with different IP addresses in high-availability configurations are not supported.

3

Preconditions

Make sure that the Microsoft SQL Server 2017 has been installed according to the Microsoft manual.

Adjust the following settings in the setup:

1. In the window *Database Engine Configuration*, select the option *Mixed Mode*.
2. Click on the button *Add Current User*, to add the current user as SQL Server administrator.
3. Create a password for the SQL Server administrator.

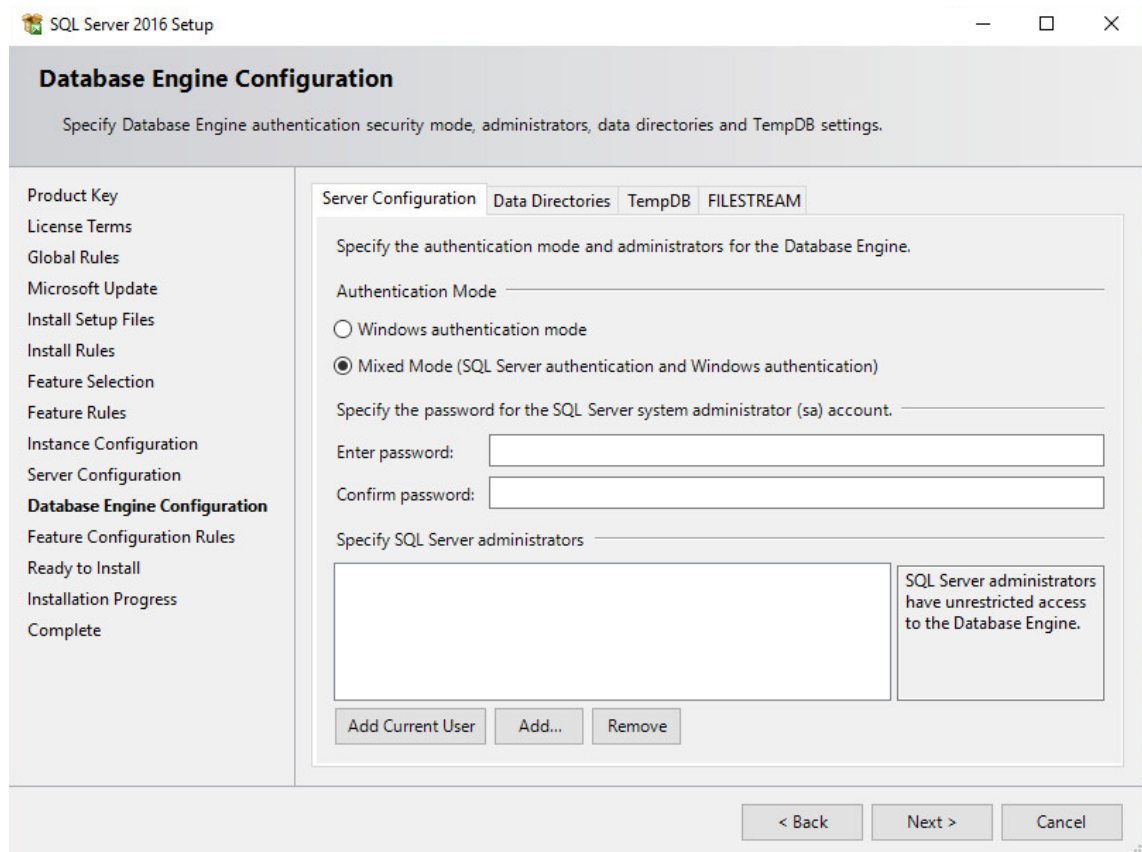


Fig. 1: Select authentication mode



The external database has to be installed before installing the *neo* software. If you would like to use an external database, you have to open the port which allows the *neo* software to access the database.

The ASC software uses the default port 1433 for MSSQL.

Observe the following order during configuration:

1. Configure SQL Server Manager
2. Install EVOIP*neo* software
3. Configure database properties
4. Configure database backup
5. Configure backup of the transaction log
6. Start SQL Server Agent

The individual steps are described in the following sections:

4.1

Configure SQL Server Configuration Manager

1. After the installation of the SQL server, start the SQL Server Configuration Manager.
2. Change to the protocol *MSSQLSERVER* in the menu item *SQL Server Network Configuration*.
3. Activate the protocol *TCP/IP*.

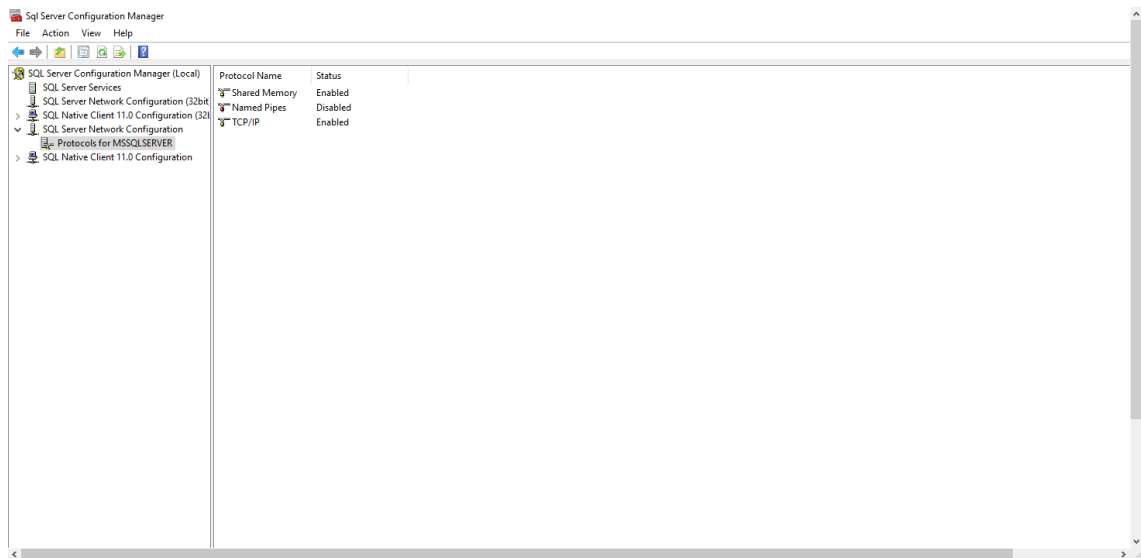


Fig. 2: Configure SQL Server Configuration Manager

If you do not want to use the default instance, a separate port has to be defined for this instance:



SQL Server Configuration Manager > *SQL Server Network Configuration* > *Protocols for...* > *TCP/IP* > *IP Addresses*

Enter this port for every IP address.

After that, restart the instance via the *SQL Server Services*. Open the port in the firewall. Use this port during the setup, too.

4.2 Install ASC software

1. Install the EVOIP_{neo} software. See installation manual *Installation EVOLUTIONneo*, *Installation EVOLUTIONneo eco* or *Installation EVOLUTIONneo XXL*.

4.3 Configure database properties



The database properties may only be defined by an experienced administrator. Setting general autogrowth parameters causes performance problems since the database for the application is not available during the autogrowth.

Check back on the value of the autogrowth after a certain period of productive usage. If required, adjust the value to a changed database size.

Configure asc_rs database:

1. Start the *SQL Server 2017 Management Studio* via *Windows key > All Programs > Microsoft SQL Server 2017*.
2. Select the database in the *SQL Server 2017 Management Studio*.

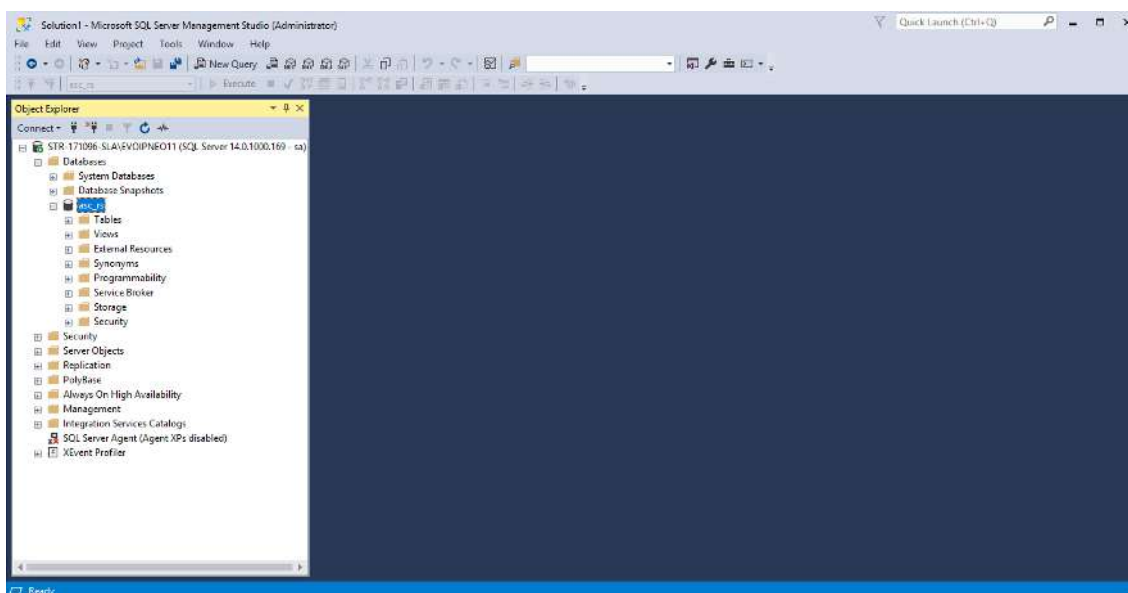


Fig. 3: Select database

3. Right-click on the folder *ASC database* and open the context menu.
4. Select the menu item *Properties*.

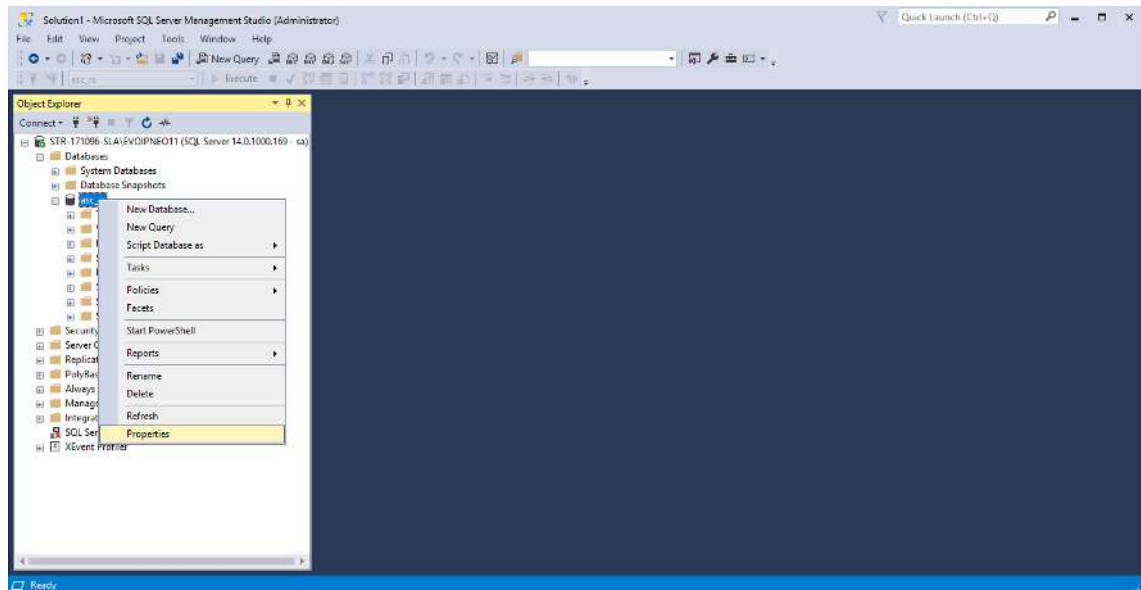


Fig. 4: Select properties of the asc_rs database

5. Click on *Select page > Files*.
6. Go to the table with the database files and scroll to the right.
7. In the line *asc_rs* in the column *Autogrowth/Maximum size*, click on the button with the 3 dots.
8. In the following window, set the parameter *File Growth* to 1/8 of the database size *in megabytes*.
9. For the maximum file size, select the option *Unlimited*.
10. Click on the button *OK*.

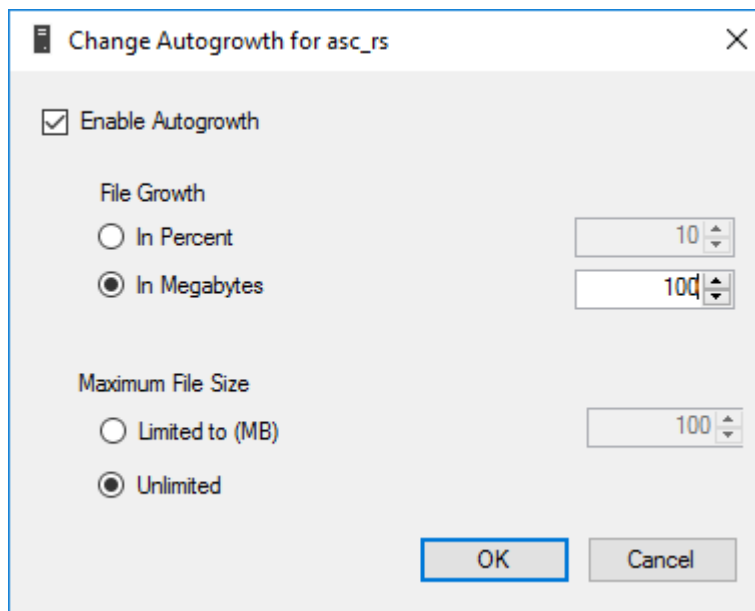


Fig. 5: Change autogrowth for the dat file (example)

11. In the line *asc_rs_log*, click on the button with the 3 dots.
12. In the following window, set the parameter *File Growth* to 1/8 of the database size *in megabytes*.
13. For the maximum file size, select the option *Unlimited*.
14. Click on the button *OK*.

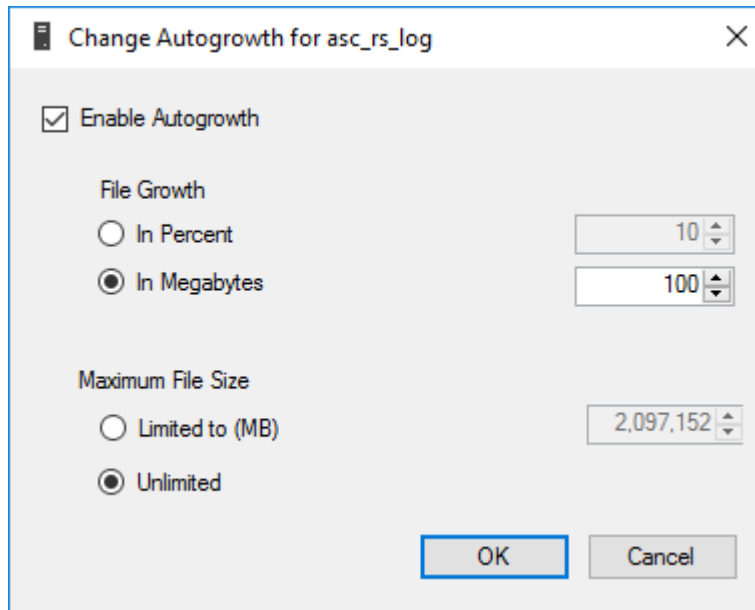


Fig. 6: Change autogrowth for the log file (example)

15. Click on *Select a page > Options*.
16. On the right side under *Recovery model*, select the option *Full*.
17. Under *Automatic > Auto Shrink*, select the value *True*.
18. Click on the button *OK*.

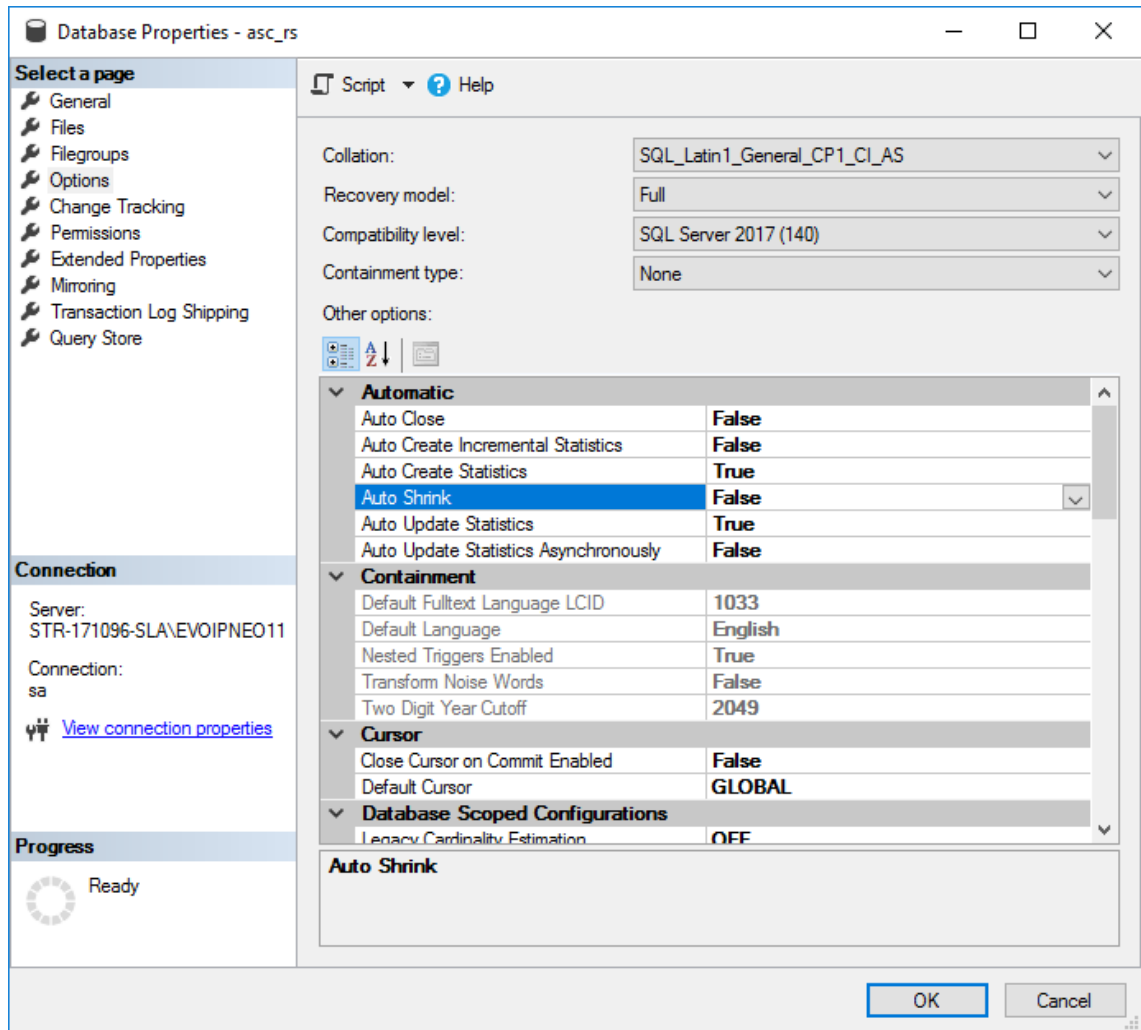


Fig. 7: Adjust recovery type

4.4

Configure database backup



The backup interval has to be calculated individually for every customer!



It is recommended to defragment the indices cyclically. For more information see <https://solutioncenter.apexsql.com/how-to-automate-and-schedule-sql-server-index-defragmentation/>.

If many database transactions take place, a daily database backup and a backup of the transaction log every 2 hours is recommended.

If few transactions are effected, a weekly database backup and a daily backup of the transaction log is recommended.

1. Start the Microsoft SQL Server 2017 Management Studio.
2. Right-click on the folder of the ASC database and open the context menu.
3. Select the menu item *Tasks > Back Up*.

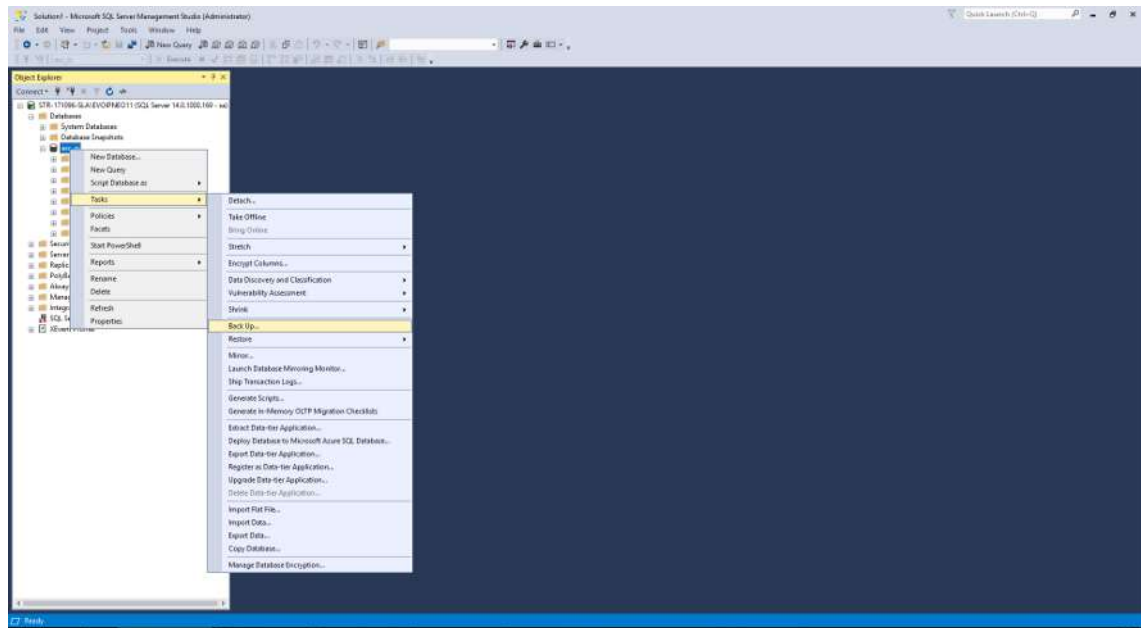


Fig. 8: Select Tasks > Back Up

4. In the following window, under *Source > Backup type*, select the option *Full*.

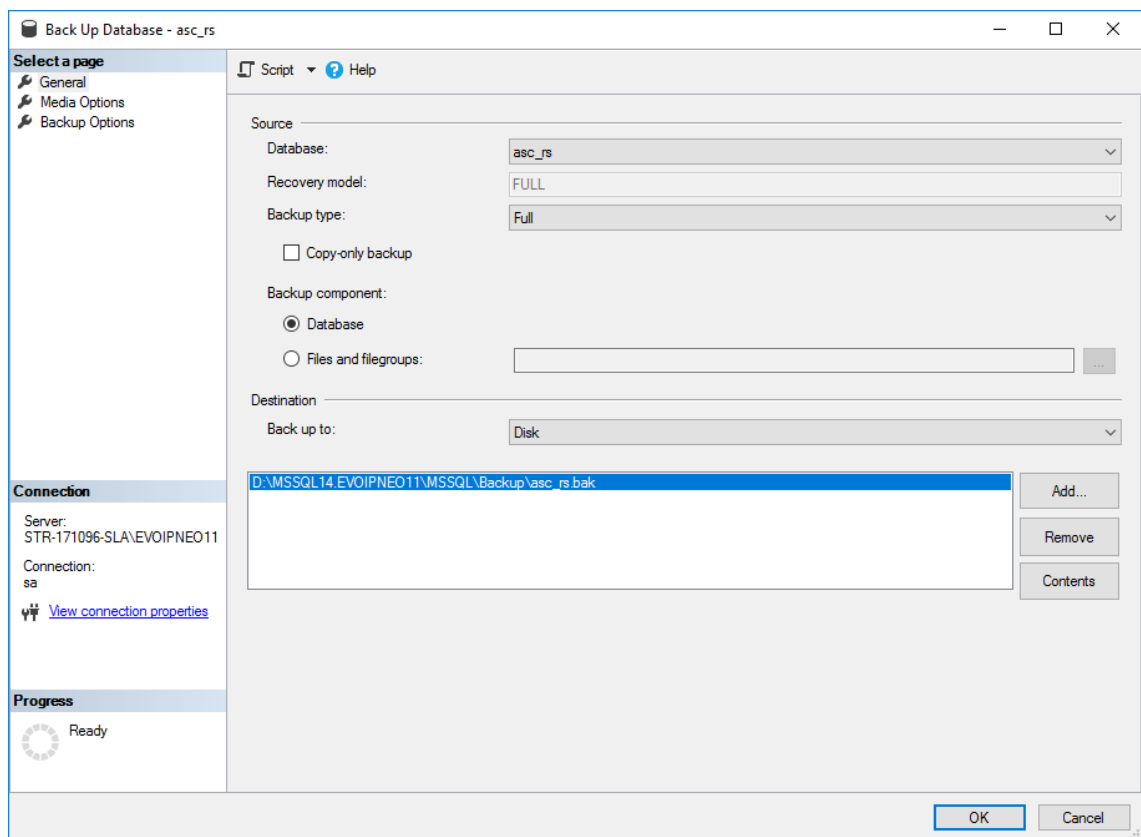


Fig. 9: Select backup type

5. Under *Destination*, click on the button *Add* to add an existing target directory or create a new one. Here, you define the name of the backup file, too.

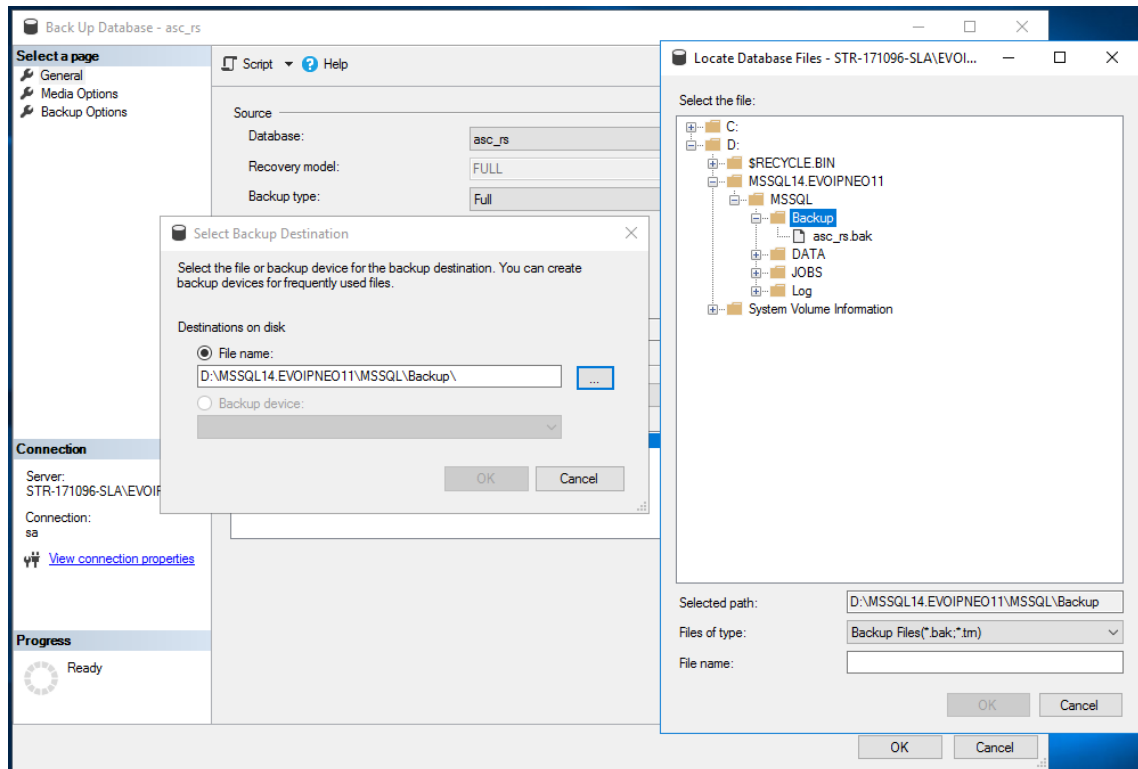


Fig. 10: Define name and target directory of the backup file

6. Click on *Select a page > Media Options*.
7. To attach the backup to a backup set which already exists on the backup computer, go to *Overwrite media > Back up to the existing media set* and activate the option *Append to the existing backup set*.
To overwrite all existing backup sets on the backup computer, go to *Overwrite media > Back up to the existing media set* and activate the option *Overwrite all existing backup sets*.

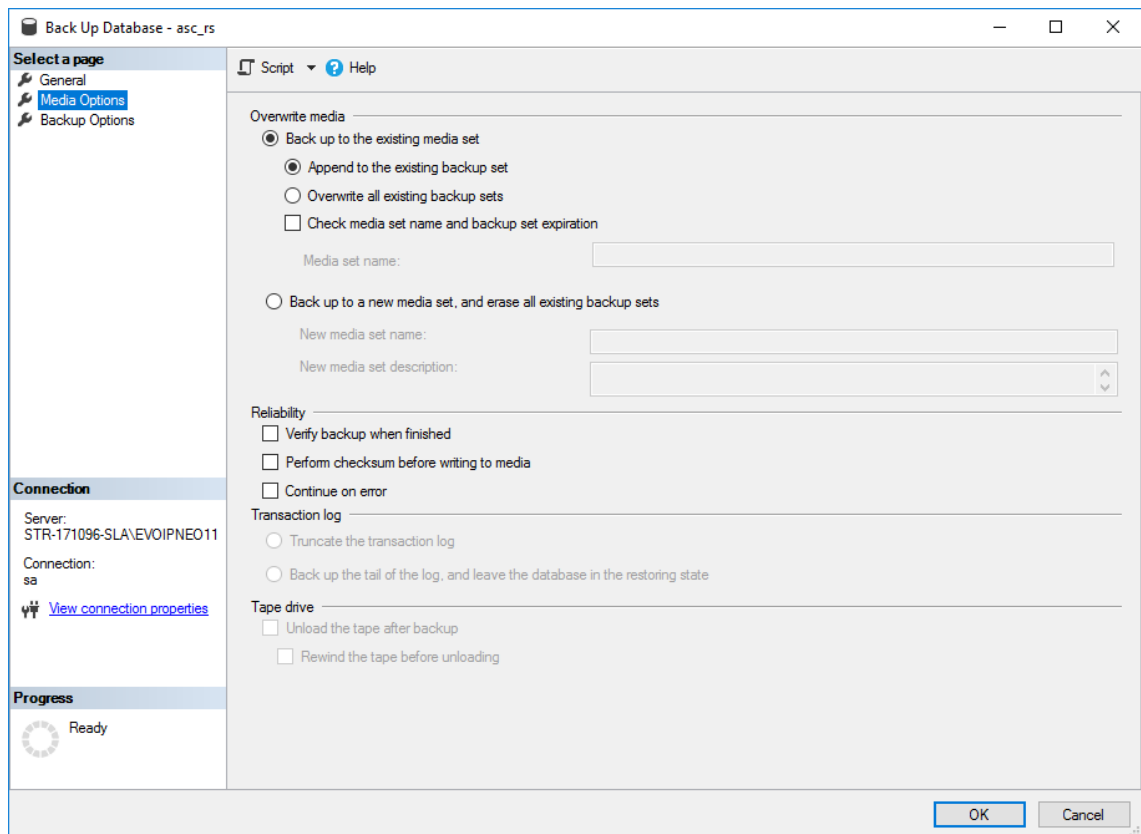


Fig. 11: Overwrite media

8. Click on *Select a page > Backup Options*.
9. In the field under *Backup set > Name*, enter a name for the backup set. In the field *Description*, you can optionally enter a description of the backup set.

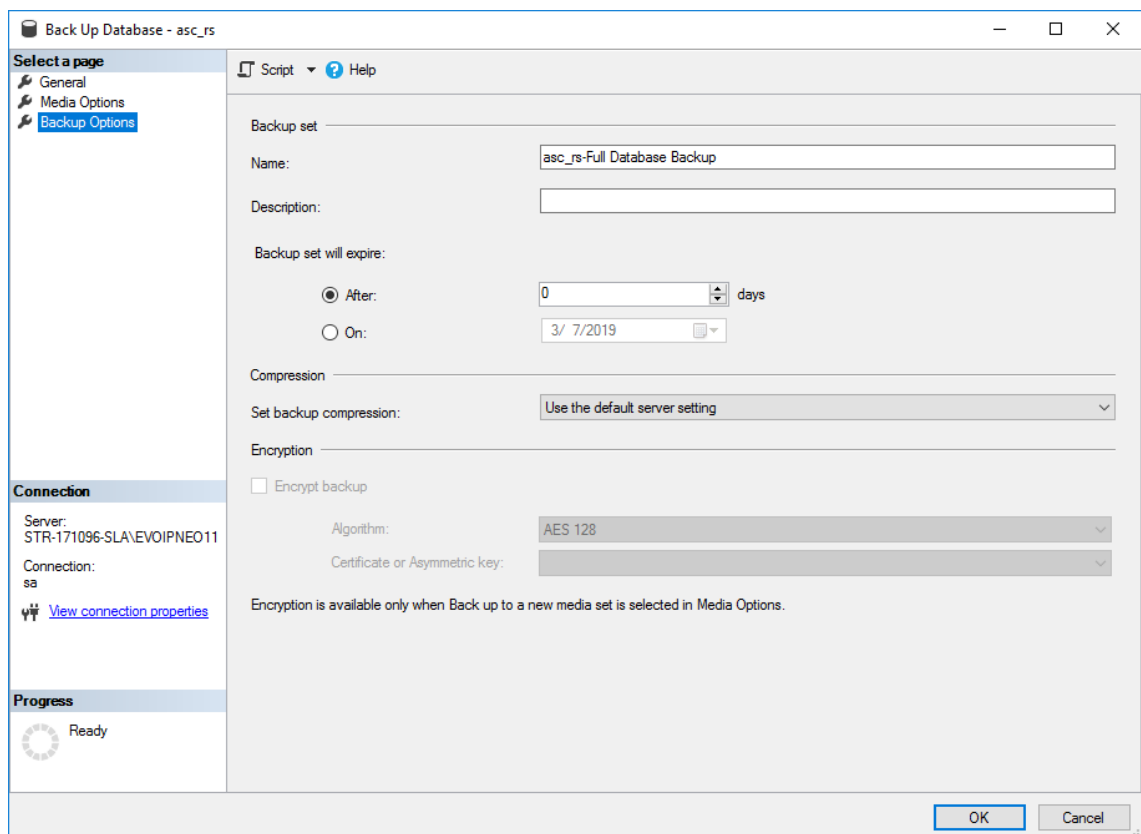


Fig. 12: Define name and description of the backup set

10. Click on *Select a page* > *General*.
11. Expand the menu *Script* by clicking on the arrow next to it.
12. Select the menu item *Script Action to Job*.


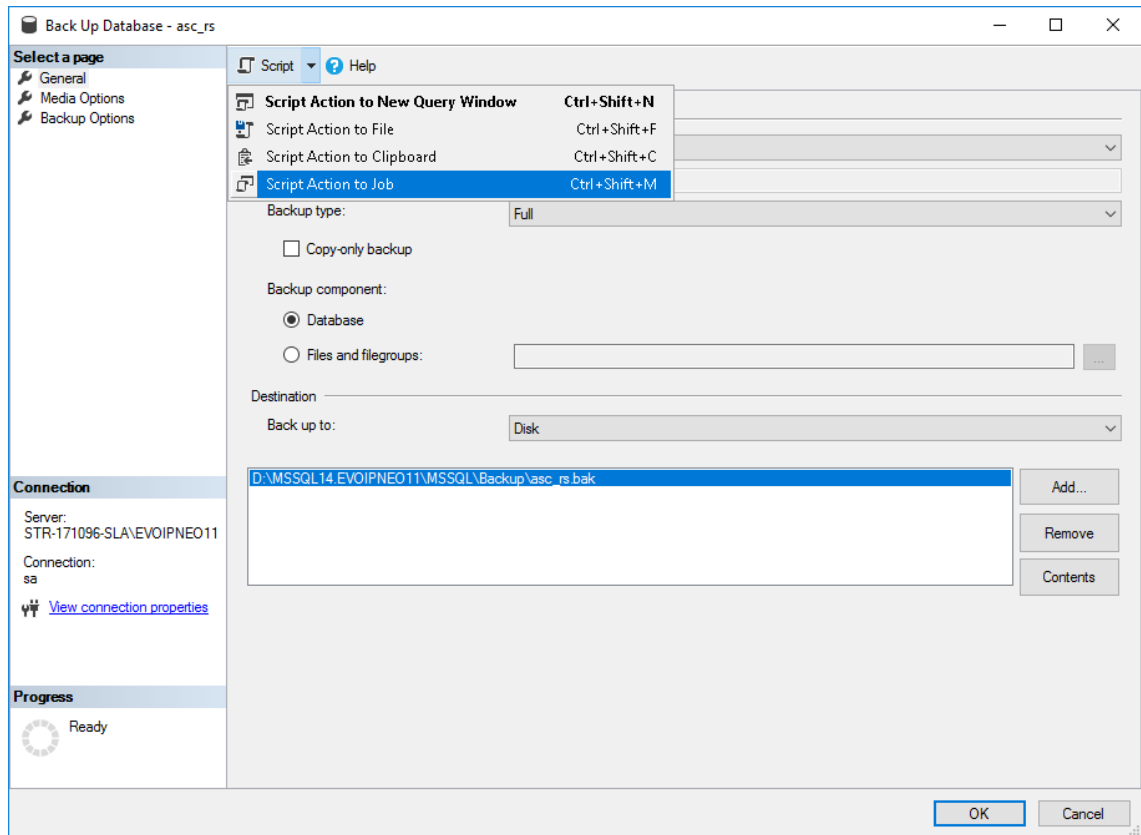


Fig. 13: Select Script Action to Job

13. In the following window in the field *Name*, enter a job name.

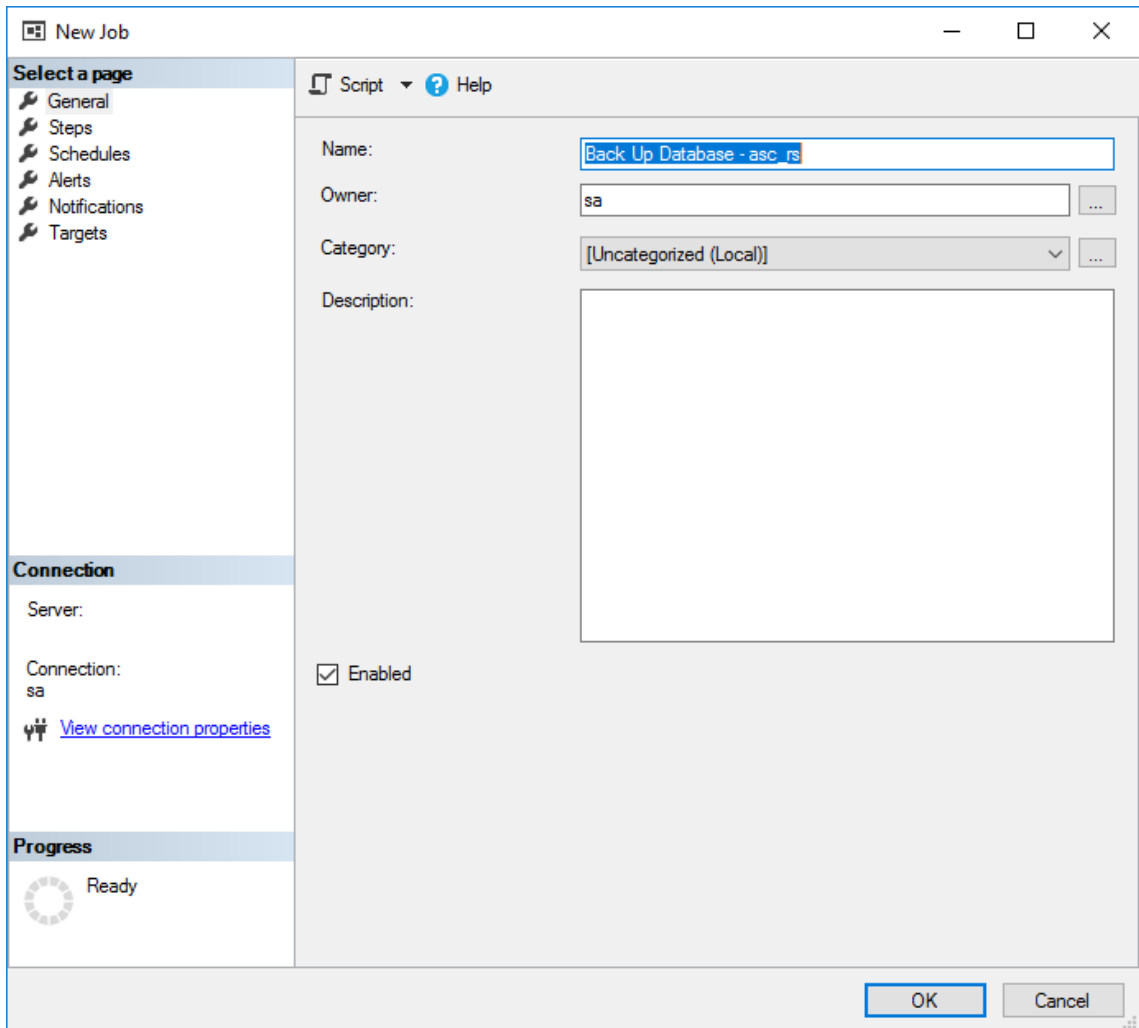

New Job

Select a page

- General
- Steps
- Schedules
- Alerts
- Notifications
- Targets

Script Help

Name: Back Up Database - asc.rs

Owner: sa

Category: [Uncategorized (Local)]

Description:

☒ Enabled

Server: sa

Connection: sa

[View connection properties](#)

Progress

Ready

OK Cancel

Fig. 14: Define job name

14. Click on *Select a page* > *Schedules*.
15. Click on the button *New* to create a new date.

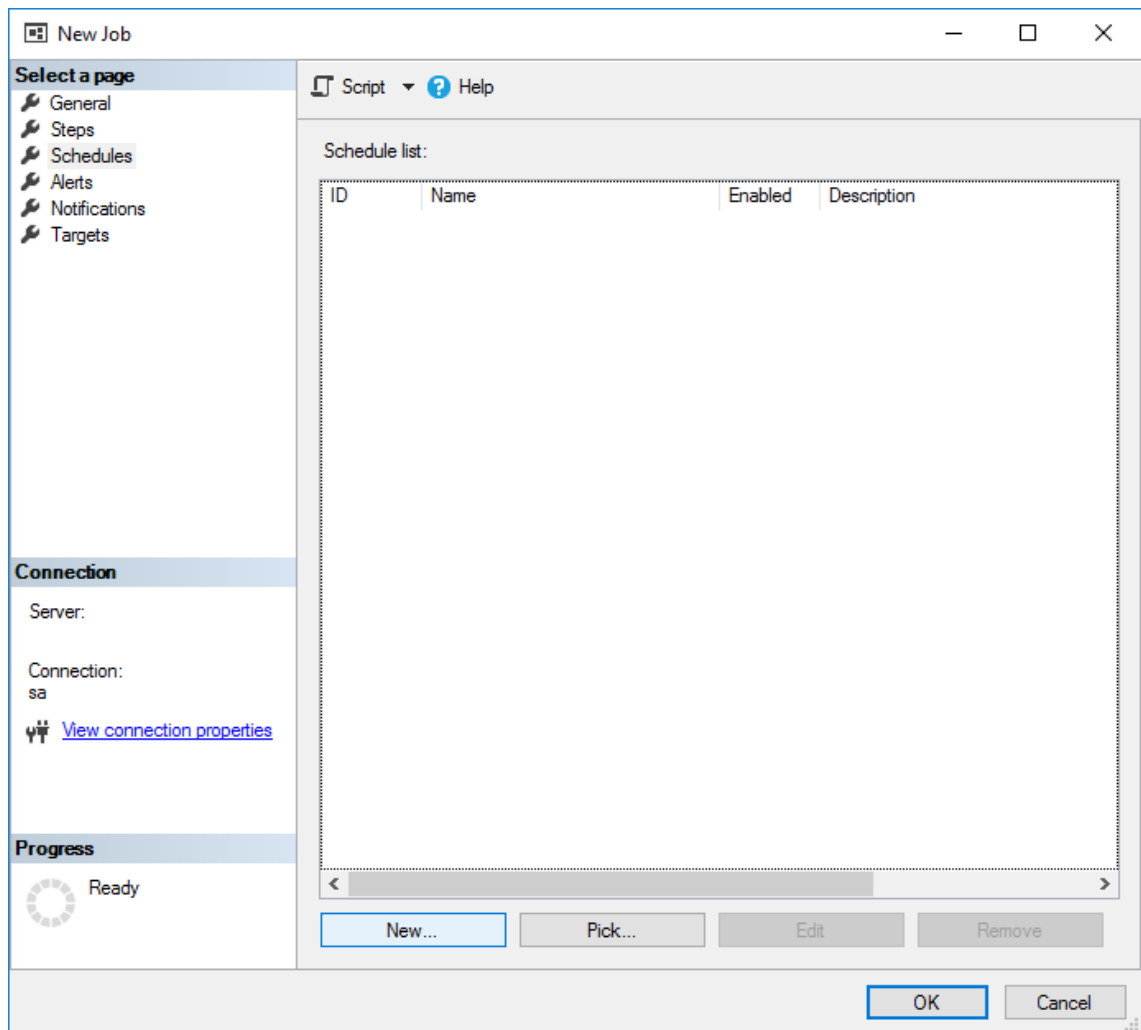


Fig. 15: Create new date

In the following window, you can configure when the backup procedure is to be repeated.

16. Under *Name*, enter a name for the schedule.
17. Confirm all windows by clicking on the button *OK*.

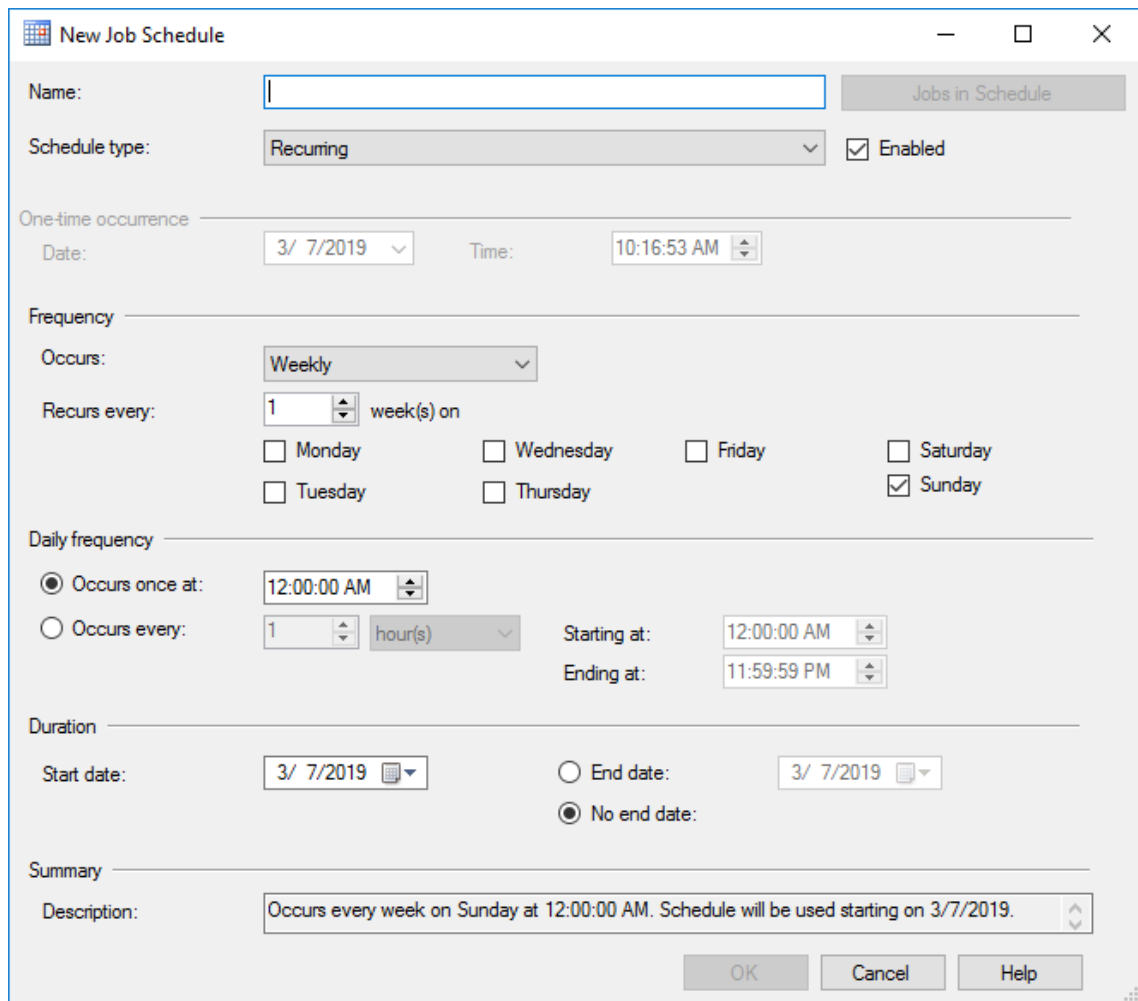


Fig. 16: Enter name for the schedule



It is possible to create several schedules for one single process. That way the process can be carried out on every first Monday of the month as well as on very 10th day of the month.



If the process does not start according to the schedule, please read Start SQL Server Agent in this installation manual.

4.5 Configure backup of the transaction log

Repeat all steps described in Configure database backup. The only difference is in the selection of the backup type. Under *Source > Backup type*, select the option *Transaction log*, see Define name and description of the backup set.

4.6 Connection to an AlwaysOn availability group

If a Microsoft SQL Cluster is supposed to be distributed across several locations, the following manual configuration is required:

1. Stop the service *ASC Application Server* on the *neo* application server.
2. On the *neo* application server, open the configuration file *domain.xml* in an editor.

Example before:

```
<jdbc-connection-pool max-pool-size="60" fail-all-connections="true" validate-atmost-once-period-in-seconds="60" datasource-classname="com.microsoft.sqlserver.jdbc.SQLServerConnectionPoolDataSource" name="ASCSuitePool-
```

```
Standby" validation-table-name="asc_rs.db_connection_control" is-connection-
validation-required="true" transaction-isolation-level="read-uncommitted"
res-type="javax.sql.ConnectionPoolDataSource">
<property name="user" value="sa"></property>
<property name="url" value="jdbc:sqlserver://#DNS-availability-group-lis-
tener#:1433;databasename=asc_rs">
</property>
<property name="password" value="${ALIAS=db_password_alias}">
</property>
<property name="selectMethod" value="cursor"></property>
</jdbc-connection-pool>
```

Example after:

```
<jdbc-connection-pool max-pool-size="60" fail-all-connections="true" vali-
date-atmost-once-period-in-seconds="60" datasource-classname="com.micro-
soft.sqlserver.jdbc.SQLServerConnectionPoolDataSource" name="ASCSuitePool-
Standby" validation-table-name="asc_rs.db_connection_control" is-connection-
validation-required="true" transaction-isolation-level="read-uncommitted"
res-type="javax.sql.ConnectionPoolDataSource">
<property name="user" value="sa"></property>
<property name="url" value="jdbc:sqlserver://#DNS-availability-group-lis-
tender#:1433;databasename=asc_rs;multiSubnetFailover=true">
</property>
<property name="password" value="${ALIAS=db_password_alias}">
</property>
<property name="selectMethod" value="cursor"></property>
</jdbc-connection-pool>
```

3. Start the service *ASC Application Server* on the neo application server.

- ⇒ You can access both nodes in different networks.
- ⇒ In case of an error, you can switch actively.

5

Quick guide

- Adjust default setting during installation of SQL Server 2017: Activate **SQL Server 2017 Setup > Database Engine Configuration > Authentication Mode > Mixed Mode:** and enter password.
- Start SQL Server Configuration Manager: activate **SQL Server Network Configuration > MSSQLSERVER > TCP/IP:**.
- Start the SQL Server 2017 Management Studio: **Windows key > All programs > Microsoft SQL Server 2017 > SQL Server Management Studio:** asc_rs database > **right-click > Properties > Select a page:** Files > **asc_rs:** [...] for Autogrowth/Maximum size and **asc_rs_log:** [...] for Autogrowth/Maximum size
 - File growth: 1/8 of the database size in megabytes
 - Maximum file size: Unlimited
- Set database properties: **Windows key > All programs > Microsoft SQL Server 2017 > SQL Server Management Studio:** asc_rs database > **right-click > Properties > Options:** Select a page > **Automatic > Auto Shrink:** True.
- Database backup cannot be configured before the EVOIP_{neo} software has been installed.
- Configure database backup: **Windows key > All programs > Microsoft SQL Server 2017 > SQL Server Management Studio > Databases > asc_rs > Tasks > Back Up > Backup type:** Full > **Backup set:** Name of the backup set > **Destination:** Add (a target directory) > **Media Options:** Select a page
 - Append backup to already existing backup sets on the backup computer: activate **Append backup to already existing backup set:**
 - Overwrite all already existing backup sets on the backup computer: Activate **Overwrite all already existing backup sets**
- Script settings: **General:** Select a page > **Script > Script Action to Job:** enter name > **Schedules > New:** enter date.

List of figures

| | | |
|---------|--|----|
| Fig. 1 | Select authentication mode..... | 6 |
| Fig. 2 | Configure SQL Server Configuration Manager | 7 |
| Fig. 3 | Select database | 8 |
| Fig. 4 | Select properties of the asc_rs database..... | 9 |
| Fig. 5 | Change autogrowth for the dat file (example)..... | 9 |
| Fig. 6 | Change autogrowth for the log file (example)..... | 10 |
| Fig. 7 | Adjust recovery type..... | 11 |
| Fig. 8 | Select Tasks > Back Up | 12 |
| Fig. 9 | Select backup type..... | 12 |
| Fig. 10 | Define name and target directory of the backup file..... | 13 |
| Fig. 11 | Overwrite media | 14 |
| Fig. 12 | Define name and description of the backup set | 14 |
| Fig. 13 | Select Script Action to Job | 15 |
| Fig. 14 | Define job name | 16 |
| Fig. 15 | Create new date..... | 17 |
| Fig. 16 | Enter name for the schedule | 18 |

List of tables

Glossary