

# ASC System Configuration

## Import of user data



## Administration manual

### for system providers and tenants

8/11/2022

### Product line Neo, version 7.x

The described functions can be used with the following ASC products:

EVOIP<sup>neo</sup>

EVOLUTION<sup>neo</sup> / XXL / eco

EVO<sup>flex</sup> (country-specific)

Please note that you can always find the most up-to-date technical documentation and product updates in the partner area on our website at <https://www.asctechnologies.com>.

Copyright © 2022 ASC Technologies AG. All rights reserved.

Windows is a registered trademark of Microsoft Corporation. VMware® is a registered trademark of VMware, Inc. All other marks and names mentioned herein may be trademarks of their respective companies.



## Contents

<b>1</b>	<b>Introduction.....</b>	<b>5</b>
<b>2</b>	<b>Supported import formats .....</b>	<b>6</b>
<b>3</b>	<b>Main view .....</b>	<b>7</b>
3.1	Toolbar Configuration Import model .....	7
<b>4</b>	<b>Detail view .....</b>	<b>9</b>
4.1	Create import source .....	9
4.1.1	Tab Details.....	9
4.1.1.1	Group field Import Source.....	10
4.1.1.2	Group field Connection Data .....	10
4.2	Create import configuration .....	11
4.2.1	Tab Details.....	12
4.2.2	Tab Import Options .....	12
4.2.2.1	Group field Create and Delete Objects.....	13
4.2.2.2	Group field Stop Criteria .....	13
4.2.3	Tab Schedule.....	14
4.2.3.1	Group field Period of Time .....	15
4.2.3.2	Group field Interval .....	15
4.2.3.3	Group field Series .....	16
4.2.4	Tap LDAP .....	17
<b>5</b>	<b>Before the import.....</b>	<b>19</b>
<b>6</b>	<b>Configuration of user import .....</b>	<b>20</b>
6.1	Create import source .....	22
6.2	Edit import source .....	22
6.3	Create import job .....	23
6.4	Edit import job.....	23
6.5	Start and stop import job.....	23
<b>7</b>	<b>Following the job execution .....</b>	<b>25</b>
<b>8</b>	<b>XSLT - Purpose and structure .....</b>	<b>26</b>
8.1	What is the XSLT file required for? .....	26
8.2	Management of the XSLT file .....	26
8.3	Structure of the XSLT file.....	26
8.3.1	Import key .....	26
8.3.2	Enter, delete or ignore attributes .....	27
8.4	Example for conditions and functions in an XSLT file.....	27
8.5	Default XSLT files .....	28
<b>9</b>	<b>Known problems and solutions .....</b>	<b>31</b>
9.1	The import job has been started but nothing happens. ....	31
9.2	The import job starts but the status report shows an error message.....	31

9.3	The import has been carried out but does not render the expected results. ....	31
9.4	The LDAP import has been carried out but no users or not all users have been im- ported.....	31
9.5	The LDAP import has been carried out but took very long and imported too much data. .....	31
<b>10</b>	<b>Overview of available Neo tags for XSLT files .....</b>	<b>32</b>
10.1	Tags for mandatory fields .....	32
10.2	Tags for general employee attributes .....	32
10.3	Tags for the assignment of organization units and roles .....	32
10.4	Tags for the agent data of employees .....	33
10.5	Tags for the employee's account.....	33
10.6	Tags for the employees' general settings .....	33
10.7	Tags for the logging settings of employees .....	33
	<b>Glossary .....</b>	<b>37</b>
	<b>Index .....</b>	<b>38</b>

## 1 Introduction

This manual describes how user data which has been stored and is administered outside the system can be imported into the recording system. This import takes place in the Configuration Import module of the application System Configuration.



User data can be migrated from version 10 recording systems. For information about migration data and requirements refer to the administration manual *Migration*.

To map the external data to the data structures of the Neo system, you need XSLT files in any case. Via the XSLT Management module, you can load XSLT files into the Neo system, edit them, and map them to the different data types.



For information about the XSLT Management module refer to the administration manual *XSLT management*.

## 2 Supported import formats

The following data can be imported:

Import object types	Possible import sources					
	User	CSV	LDAP	XML	SFTP	Ext. DB
Employees of Tnt	Tnt	X	X	X	-	-
Employees of SP	SP	X	X	X	-	-
Organization structures	Tnt	X	X	X	-	-
Evaluation templates	Tnt	-	-	X	-	-
Evaluations	Tnt	-	-	X	-	-
Call Director Customer Surveys	Tnt	-	-	X	-	-
Phones	SP	X	-	X	-	-

Import object types	Possible import sources					
	User	CSV	LDAP	XML	SFTP	Ext. DB
Recording check mechanism	SP	-	-	-	X	X
Recording check mechanism	Tnt	-	-	-	X	X

The import functionality for user data supports the following import formats:

- CSV
- XML
- LDAP
- Web Service

Regardless of the format, the import is the same: The data to be imported are first turned into a uniform Neo XML format with the object type receiving the attribute ImportKey for unambiguous mapping. With LDAP import, the LDAP-UUID can be mapped to the ImportKey.



Make sure to map the ImportKey to an unambiguous identifier when importing data from external sources. While the LDAP-UUID can be used during the LDAP import, the LDAP-DN does not allow for unambiguous identification as it may change under certain circumstances.

As an alternative to the attribute ImportKey, you can define a combination of attributes to unambiguously identify the employee.

If you would like to import data of the same system users from an LDAP source as well as from another system, e. g. as XML file, the XML files must definitely contain the LDAP-UUID.


To map external data to the data structures of the Neo system, you need customized XSLT files. For some import object types, ASC offers default XSLT files, see [chapter "Default XSLT files", p. 28](#). Upon request, ASC can adjust the XSLT files to your individual data structures.

## 3

## Main view

1. Select the menu item *More > Configuration Import* in the navigation bar.

When importing configuration data, you have to differentiate between import sources and their corresponding import configurations (import jobs). Therefore, the main view is organized in a tree structure.

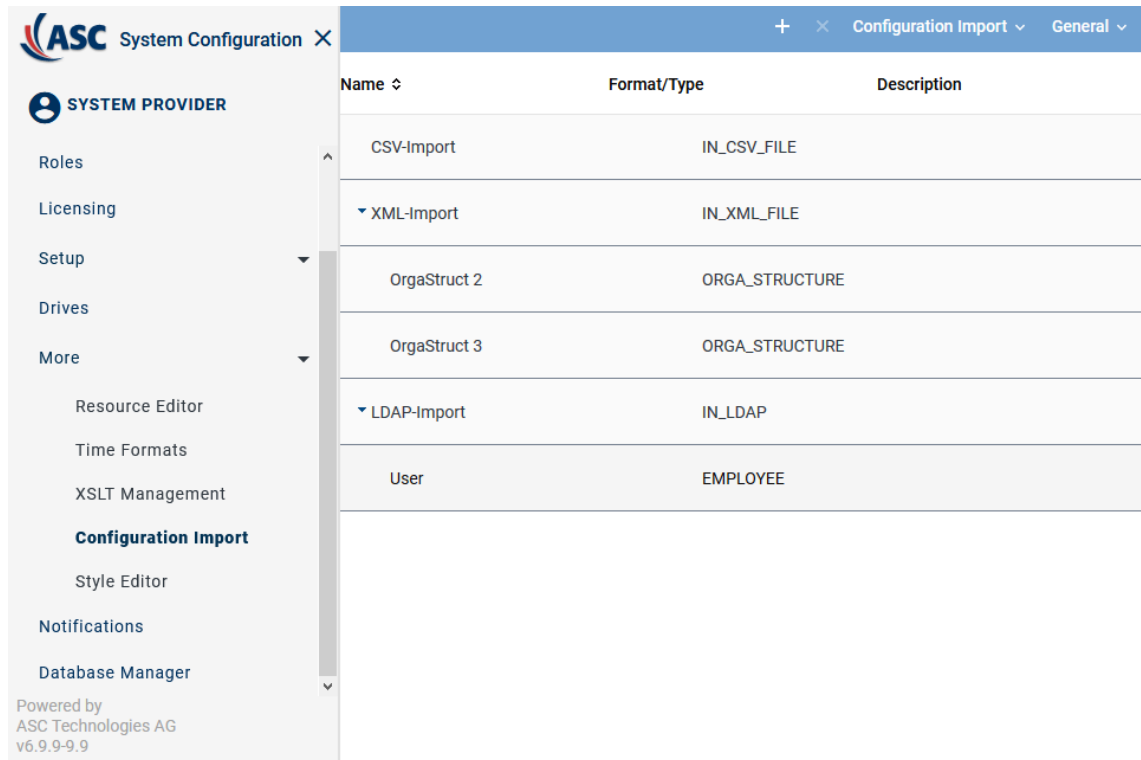

Name	Format/Type	Description
CSV-Import	IN_CSV_FILE	
▼ XML-Import	IN_XML_FILE	
OrgaStruct 2	ORGA_STRUCTURE	
OrgaStruct 3	ORGA_STRUCTURE	
▼ LDAP-Import	IN_LDAP	
User	EMPLOYEE	

Fig. 1: Configuration import - main view

The following information is displayed in the main view:

<i>Name</i>	Name of the import source or import job.
<i>Format/Type</i>	Shows the format or type of the imported configuration data.
<i>Description</i>	Shows the description of the import source or import job.



By clicking on the icons ▶ or ▼ in front of an import source, you can show or hide the import jobs which have been created for this import source.

## 3.1

## Toolbar Configuration Import model

The toolbar offers the following functions.





Fig. 2: Configuration import - toolbar

	<b>Create</b>	<p>Create a new element. The following possibilities are available:</p> <ul style="list-style-type: none"> <li>• CSV</li> <li>• XML</li> <li>• LDAP</li> <li>• SFTP for Recording Check feature</li> </ul>
---	---------------	--

		<ul style="list-style-type: none"> <li>• <i>External database</i> for Recording Check feature</li> </ul>
	<i>Delete</i>	Deletes the selected element upon confirming the security prompt.
<i>Configuration Import</i>		
	<i>Create New Import Configuration</i>	Creates a new import configuration for the selected import source.
	<i>Start Job</i>	Starts the selected import job.
<i>General</i>		
	<i>General Help</i>	By clicking on the menu item General Help, a description of the application you are currently viewing is opened.
	<i>Module Help</i>	By clicking on the menu item Module Help, a description of the module you are currently viewing is opened.



For detailed descriptions of the default functions such as *Search*, *Print*, *Adjust table* or *Help* refer to the user manual for system providers *General information - System Configuration*.



## 4

## Detail view


The detail view displays all settings of the selected import source or import job. The content of the detail view depends on whether you edit an import source or an import job.

This manual describes the following import functionalities:


- *Recording Check Mechanism*
  - *Cisco CDR data via SFTP*  
see Recording Check Mechanism for Cisco
  - *SfB session data from external database*  
see Recording Check Mechanism for SfB
  - *Mitel CIL data via SFTP*  
see Recording Check Mechanism for Mitel MX-ONE
- *Evaluation templates*  
see Import evaluation templates
- *Evaluations*  
see Import evaluations
- *Call Director customer surveys*  
see Call Director customer surveys

## 4.1

## Create import source

1. Click on the icon  (*Create*) in the toolbar.
2. From the context menu, select the format of the import source, in the example *XML*.

In the detail view of the import source, you can configure the connection data.

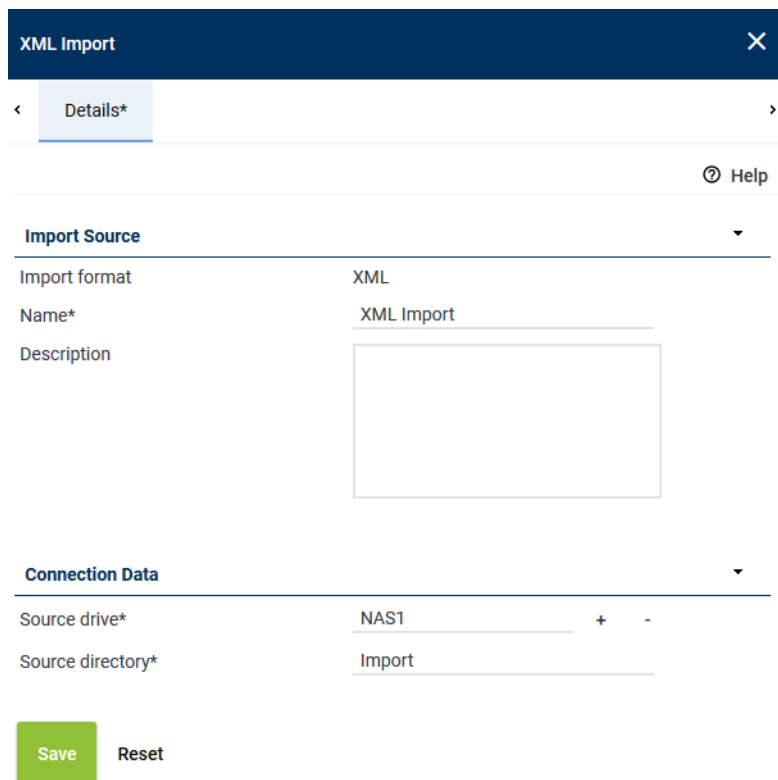

The screenshot shows the 'XML Import' configuration window. It has a dark blue header with the title 'XML Import' and a close button. Below the header is a tab labeled 'Details\*'. On the right side of the tab bar is a 'Help' icon and label. The main content area is divided into two sections: 'Import Source' and 'Connection Data', each with a dropdown arrow. Under 'Import Source', there are three fields: 'Import format' (set to 'XML'), 'Name\*' (set to 'XML Import'), and 'Description' (an empty text area). Under 'Connection Data', there are two fields: 'Source drive\*' (set to 'NAS1') and 'Source directory\*' (set to 'Import'). At the bottom left, there are two buttons: a green 'Save' button and a grey 'Reset' button.

Fig. 3: Detail view Configure import source (example)

## 4.1.1

## Tab Details

Here, you can display and edit the settings for the selected import source.

It depends on the selected import format, which group fields are available in the tab *Details*.

#### 4.1.1.1 Group field Import Source



Fig. 4: Group field Import Source (example)

<i>Import format</i>	Shows the selected import format. <b>NOTICE!</b> The import format is defined when creating the import source and cannot be changed afterwards.
<i>Name</i>	Enter a name for the import source.
<i>Description</i>	Enter an optional description of the import source.
<i>Web service type</i>	Type of the source for the web service. Select the type from the drop-down list.

#### 4.1.1.2 Group field Connection Data



This group field is only available for the import formats *XML* and *CSV*.

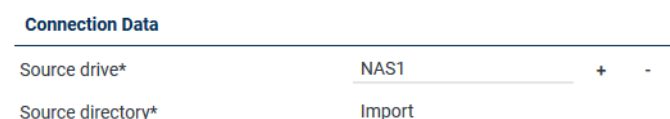


Fig. 5: Group field Connection Data

<i>Source drive</i>	Select the drive from which the data is supposed to be imported. See <a href="#">chapter "Assign drive", p. 10</a> .
<i>Source directory</i>	Enter the path to the directory from which the data is supposed to be imported.



For the import format *LDAP*, the **LDAP** connection data is transferred from the Tenants module. For information about the configuration and activation of the **LDAP** connection data in the Tenants module refer to the administration manual *System Configuration - User Management (for system providers)*.

##### 4.1.1.2.1 Assign drive

1. Click on the button **+** on the right of the entry field.
2. Select a drive from the list.

Drives				
Device Type ↕	Name ↕	Path ↕	Free Disk Space ↕	Server ↕
Internal harddisk	Internal harddisk	C:\	<div><div></div></div>	WIN-PP28N16CIDB
Internal harddisk	Internal harddisk	E:\	<div><div></div></div>	WIN-PP28N16CIDB

Zeilen pro Seite 20 0 - 0 von 0

Hinzufügen Abbrechen

Fig. 6: Add drive

- To apply the selection, click on the button *Add*.  
To discard the selection and close the window, click on the button *Cancel*.

## 4.2

### Create import configuration

Import configurations allow creating and editing import jobs for different import sources.

Details\*
Import Options
Schedule

Help

Basic Information

Name\*

User

Description

Import object type\*

Employee

XSLT\*

XML-Import

Fig. 7: Detail view Import Configuration (example)

The detail view of the import configuration consists of the following tabs:

- Details**  
Here, you can display and edit the basic information of the import job.  
See [chapter "Tab Details", p. 12](#).
- Import Options**  
Here, you can define according to which criteria objects are supposed to be created and deleted. In addition, you can define stop criteria for the import job.  
See [chapter "Tab Import Options", p. 12](#).
- Schedule**  
Here, you can display and edit the settings of the schedule.  
See [chapter "Tab Schedule", p. 14](#).

- **LDAP**


Here, you can configure the filter settings for the import of the **LDAP** data to refine the selection of the data to be imported.

This tab is only available for import jobs in **LDAP** format.

See [chapter "Tap LDAP", p. 17](#).

#### 4.2.1 Tab Details

Here, you can display and edit the basic information of the import job.

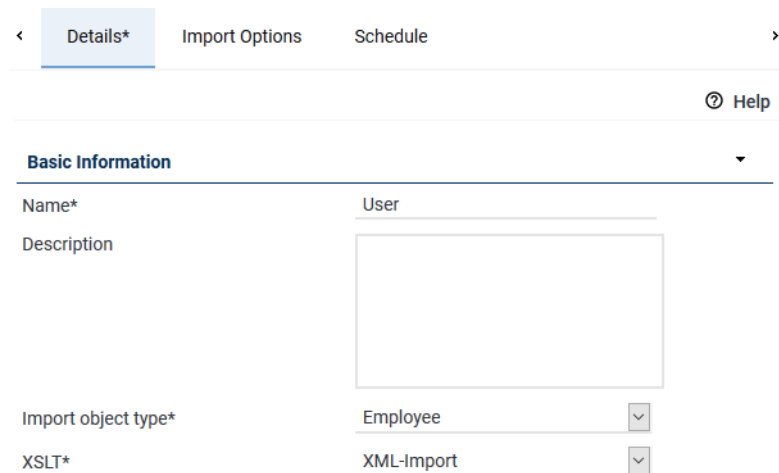


The screenshot shows the 'Details' tab selected in a navigation bar with 'Import Options' and 'Schedule' tabs. Below the tabs is a 'Help' icon. The main content area is titled 'Basic Information' and contains the following fields:

- Name\***: A text input field.
- User**: A text input field.
- Description**: A large text area.
- Import object type\***: A dropdown menu with 'Employee' selected.
- XSLT\***: A dropdown menu with 'XML-Import' selected.

Fig. 8: Import configuration - tab Details

#### 4.2.2 Tab Import Options

Here, you can define according to which criteria objects are supposed to be created and deleted. In addition, you can define stop criteria for the import.

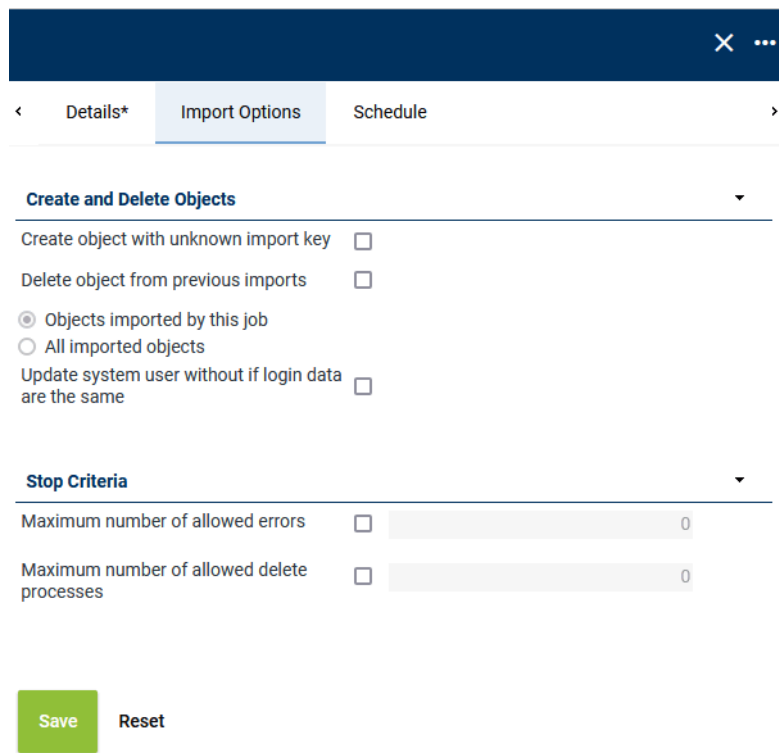

The screenshot shows the 'Import Options' tab selected in a navigation bar with 'Details\*' and 'Schedule' tabs. Below the tabs is a 'Close' (X) and 'More' (...) icon. The main content area is titled 'Create and Delete Objects' and contains the following options:

- ☐ Create object with unknown import key
- ☐ Delete object from previous imports
- ☒ Objects imported by this job
- ☐ All imported objects
- ☐ Update system user without if login data are the same

Below this section is the 'Stop Criteria' section:

- Maximum number of allowed errors**: ☐ 0
- Maximum number of allowed delete processes**: ☐ 0

At the bottom, there are two buttons: **Save** (green) and **Reset** (grey).

Fig. 9: Import configuration - tab Import Options



Which of the following options are available depends on the *import object type* you have selected in the tab *Details*.

#### 4.2.2.1

#### Group field Create and Delete Objects

**Create and Delete Objects** ▼

Create object with unknown import key ☐

Delete previously imported objects which are no longer contained in the current import ☒

☒ Objects imported by this job

☐ All imported objects

Update system user if login data is the same ☐

Fig. 10: Group field Create and Delete Objects

<i>Create object with unknown import key</i>	<p>Select whether new sets of data can be imported and created or whether only existing sets of data are supposed to be refreshed. For the unambiguous identification of already imported data sets, the import key from the deployed <a href="#">XSLT</a> file is compared.</p> <p><input checked="" type="checkbox"/> = New sets of data can be created.</p> <p><input type="checkbox"/> = No new sets of data.</p>
<i>Delete previously imported objects which are no longer contained in the current import</i>	<p>Select whether existing sets of data which have been imported with previous import jobs are supposed to be deleted if they are not contained in the current import file.</p> <p><input checked="" type="checkbox"/> = Sets of data from other imports are deleted. Subsequently define in detail which data sets exactly are supposed to be deleted.</p> <p><input type="checkbox"/> = Sets of data from other imports are not deleted.</p> <ul style="list-style-type: none"> <li>• <i>Objects imported by this job</i>: Only data sets which have been imported by this same job are deleted. <b>NOTICE!</b> Data of this job which has been imported with previous import jobs is deleted if it is no longer contained in the current import.</li> <li>• <i>All imported objects</i>: All imported data sets are deleted. <b>NOTICE!</b> Data of all jobs which has been imported with previous import jobs is deleted if it is no longer contained in the current import.</li> </ul> <p><b>NOTICE!</b> In the event of an error during the import, the function is deactivated automatically, i. e. no sets of data are deleted.</p> <p><b>NOTICE!</b> Manually created sets of data are not deleted.</p>
<i>Update system user if login data is the same</i>	<p>Select whether existing user data can be imported and updated if it does not have an import key but the user name is known.</p> <p><input checked="" type="checkbox"/> = User data can be updated.</p> <p><input type="checkbox"/> = User data cannot be updated.</p>

#### 4.2.2.2

#### Group field Stop Criteria

**Stop Criteria** ▼

Maximum number of allowed errors ☒

Maximum number of allowed delete processes ☒

Fig. 11: Import configuration - group field Stop Criteria

<i>Maximum number of allowed errors</i>	<p>Select whether the import job is supposed to be canceled when an error occurs. Possible errors are failing to assign a <a href="#">PBX</a>, not being able to find a role or organization unit or a user missing essentially required attributes.</p> <p><input checked="" type="checkbox"/> = Import job is canceled when the number of errors entered here is exceeded.</p> <p><input type="checkbox"/> = Import job is not canceled.</p>
<i>Maximum number of allowed delete processes</i>	<p>Select whether the deletion process is supposed to be canceled if automatic deletion processes occurs.</p> <p>If the option <i>Delete objects from previous imports</i> has been selected in the group field <i>Create and Delete Objects</i>, then this option here allows selecting the maximum number of data sets which can be deleted before the deletion process is canceled. If the entered number is exceeded, no data sets are deleted.</p> <p><input checked="" type="checkbox"/> = Deletion process is canceled when the number of deletion processes entered here is exceeded.</p> <p><input type="checkbox"/> = Deletion process is not canceled.</p>

### 4.2.3 Tab Schedule

In the tab *Schedule*, you can display and edit the settings of the schedule.

User

<

Details\*

Import Options

Schedule

LDAP\*

>

Execution

☐ Once  
☒ Interval  
☐ Series

Period of Time

Start

☒ Immediately  
☐ 01/21/2019 01:48:54

End

☒ Never  
☐ 01/21/2019 01:48:54

Interval

0 Month(s)

0 Day(s)

0 Hour(s)

5 Minute(s)

Series

Save

Reset

Fig. 12: Tab Schedule

Define in the general section whether the job is executed only once or periodically.

Execution • Once

The job is executed exactly once and started on the date which has been defined in the section *Period of Time*.

- *Interval*

The job is repeated in intervals as defined in the group field *Interval*.

- *Series*

The job is repeated on serial dates as defined in the group field *Series*.

If an import job fails, you are informed about this at the following locations in the system:

- In the application Portal, you receive a respective notification if the generation of such a notification has been activated in the Notifications module of the application System Configuration, see administration manual *System Configuration Notifications module*.



In the application System Monitoring, you receive information about the job status in the Jobs module, see *User manual System Monitoring*.

If the failed job is a job of the execution type *Once*, you have to initiate the job manually once again, after eliminating the underlying cause for the failure. Otherwise the job is not executed again.

#### 4.2.3.1

##### Group field Period of Time

Define the period of time during which the job is supposed to be executed.

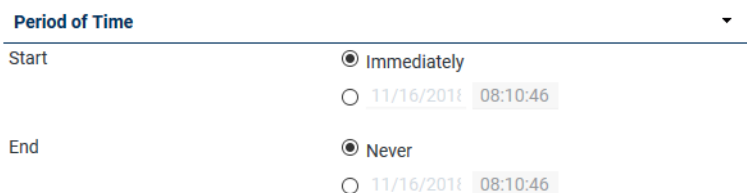




Fig. 13: Tab Schedule - configure group field Period of Time

<b>Start</b>	<ul style="list-style-type: none"> <li>• <i>Immediately</i> The job is started immediately.</li> <li>• Entered date The start is defined by the entered date. You can enter the date directly in both entry fields via the keyboard or by clicking on the icon .</li> </ul>
<b>End</b>	<ul style="list-style-type: none"> <li>• <i>Never</i> The job never ends.</li> <li>• Entered date The end is defined by the entered date. You can enter the date directly in both entry fields via the keyboard or by clicking on the icon .</li> </ul>

#### 4.2.3.2

##### Group field Interval



This group field is only active if the option *Interval* has been selected as execution.

Define the interval in which the job is supposed to be repeated.

**Interval** ▼

---

Month(s)
  Day(s)
  Hour(s)

Minute(s)

Fig. 14: Tab Schedule - configure group field Interval

You can define the interval arbitrarily. Enter the values directly into the entry fields via the keyboard.

#### 4.2.3.3 Group field Series



This group field is only active if the option type *Series* has been selected as execution type.

Define at which points in time the job is supposed to be repeated.

**Series** ▼

---

Repeat

☐ Daily  
☐ Weekly  
☐ Monday  
☐ Tuesday  
☐ Wednesday  
☐ Thursday  
☐ Friday  
☐ Saturday  
☐ Sunday  
☒ Monthly  
☒  + -  
☐

Fig. 15: Schedule - Series

<b>Repeat</b>	<p>Days on which the job is supposed to be executed.</p> <ul style="list-style-type: none"> <li>• <i>Daily</i> The job is repeated daily.</li> <li>• <i>Weekly</i> The job is repeated on the selected days. You can select one or several weekdays.</li> <li>• <i>Monthly</i> The job is repeated on the selected days. You can either select particular dates or certain days. See <a href="#">chapter "Configure monthly repetition on fixed dates", p. 16</a> and <a href="#">chapter "Configure monthly repetition on fixed days", p. 17</a>.</li> </ul>
---------------	---

##### 4.2.3.3.1 Configure monthly repetition on fixed dates

1. Select the upper option:

☒ Monthly  
☒  + -  
☐

Fig. 16: Configure fixed dates



- Click on the button **+** to select dates in a calendar.

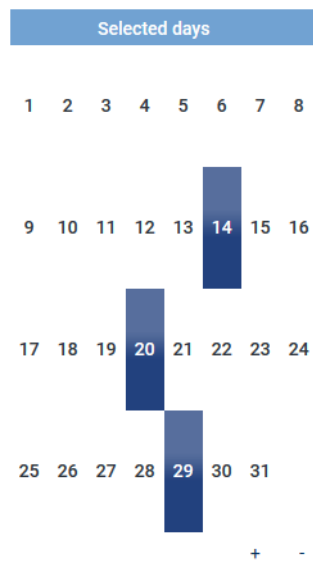


Fig. 17: Select dates

- Click on all dates on which the job is supposed to be executed.  
To revoke a selection, click on the selected date once again. The selection is deleted.  
⇒ The selected dates are inserted automatically into the entry field.
- Click on a spot outside the calendar to apply the selected dates and close the calendar.
- If you would like to correct the selection of the dates, you can open the calendar again by clicking on the button **+**.  
Adjust the dates according to the description.
- If you would like to delete all selected dates, click on the button **-**.  
⇒ All dates in the entry field are deleted.

#### 4.2.3.3.2 Configure monthly repetition on fixed days

- Select the lower option:




Fig. 18: Configure fixed days

- In the two drop-down lists, select the day of every month on which the job is supposed to be executed.

#### 4.2.4 Tap LDAP



This tab is only available for import jobs in **LDAP** format.

Here, you can specify the selection of the **LDAP** data to be imported. Only the **LDAP** data which meets the criteria of the configured filter is imported.

User

<

Details\*

Import Options

Schedule

LDAP\*

>

LDAP Filter Settings

Root node\*

CN\_users.dc=example2,OU=Groups,(

Recursive search

☒

Search page by page

☐

Object class

User

Other filters

(max. 9000 characters)

Save

Reset

Fig. 19: Import configuration - tab LDAP

### 5 Before the import

In the Configuration Import module, you can define import sources and import jobs which allows you to import user data into the recording system. To be able to create an import job, the following conditions must be given:

- An import source matching the data's format must have been created.
  - If users are supposed to be imported by means of [LDAP](#), make sure that a working [LDAP](#) connection has been set up in the Tenants module.
  - If users are supposed to be imported from a [CSV](#) or [XML](#) file, make sure that a [NAS](#) drive has been created, configured, and assigned to the tenant. The corresponding [CSV](#) or the [XML](#) file with the user data, must have been stored in a subfolder (e. g. import data) of this [NAS](#) drive (e. g. NAS\Importdaten\user.csv). **NOTICE! This subfolder (in the example import data) must have been released.**
- An XSLT mapping matching the data's format must have been created.  
For information about [XSLT](#) files can be found under [chapter "XSLT - Purpose and structure"](#), p. 26 in the administration manual *System Configuration - XSLT management*.
- [PBX](#) assignment:  
If a [PBX](#) is supposed to be assigned to the users during the import, make sure that the [PBX](#) has been set up in the System Configuration. In multi-tenant systems, the respective extensions or the [PBX Agent IDs](#) must be shared.

## 6 Configuration of user import

Creating an import job is a two-step process:

### 1. Create import source:

The import source defines where the user data comes from, e. g. from an [LDAP](#) or a [CSV](#) file. If a [CSV](#) or an [XML](#) file is used, the previously configured [NAS](#) drive must be selected as source drive (in the example [NAS](#)) and the contained subfolder where the [CSV](#) or [XML](#) file has been saved as source directory (in the example *import data*).

### 2. Create import configuration:

By creating the import configuration, the import job is defined. Depending on the selected source, configuration possibilities may differ.

The following steps describe the options to configure the import and to set up a schedule. After that, you find configuration tips on compiling an [LDAP](#) file

### Setting the import options

#### 1. Configure the following options in the group field *Create and Delete Objects*:

- *Create object with unknown import key*

This option defines whether new users are created with the import or whether previously imported users are updated. For the unambiguous identification of already imported users, the import key from the deployed [XSLT](#) file is compared. Select this option if you would like to allow the import of new user with an unknown import key as well as if you would like to update existing users. If you do not want to import new users with unknown import keys but only update existing users, deactivate this option.

- *Delete objects from previous imports:*

If this option has been activated, all previously imported users who have not been created or updated with the latest import will be deleted from the system. This applies to imported users only. Users who have been created in the system manually are not deleted.

- *Update system user if login data are the same:*

This option allows you to update manually created users by means of an import. The *user name* of the existing employee is compared with the name of the imported user.

#### 2. Configure the following options in the group field *Stop Criteria*:

- *Maximum number of allowed errors*

This option defines how many errors there may be during the import before the process is stopped. Possible errors are failing to assign a [PBX](#), not being able to find a role or organization unit or a user missing essentially required attributes.

- *Maximum number of allowed delete processes*

If the option *Delete objects from previous imports* has been selected, then this option here allows you to select the maximum number of users which can be deleted at once before the deletion process is canceled.

Example: *When entering the value 10, a maximum of 10 existing users will be deleted upon a new import. If there are 11 previously existing users who would be deleted with a new import, then no users would be deleted at all.*



As a precaution, the deletion process is canceled as soon as one error occurs during the import. Once just one error occurs during the import of a user, no existing users are deleted despite a respective configuration. Previously existing sets of data remain unchanged.



For further information see [chapter "Tab Import Options", p. 12.](#)

### Set up a schedule

1. In the tab *Schedule*, configure when and how often a job is supposed to be executed, e. g. *once, daily, weekly or at what time.*



For further information see [chapter "Tab Schedule"](#), p. 14.



Note that any job must always be activated by clicking on *Start job* regardless of the selected start time, so that it is registered correctly and can later be started at the configured time.

### Configure LDAP filter settings

The following filter settings can be configured when creating an [LDAP](#) import job:

#### Root node:

Enter the path within the [LDAP](#) structure leading to the user data. It must have a valid [LDAP](#) path structure.

*Example:* `OU=Groups,OU=AGENTS,DC=asc-sb,DC=lan`

When picturing [LDAP](#) as a file system comparable to the Windows Explorer, this would equal: `lan/asc-sb/agents/groups`

In this example, the job would only search for users in the [LDAP](#) structure under OU (organization unit) *Groups*. Users outside this OU will not be read out.

#### Recursive search

This option allows searching for users in all subordinated directories in addition to the indicated root node.

*Example:* `OU=AGENTS,DC=asc-sb,DC=lan`

If the option *Recursive search* has been activated, not only the OU *Agents* is searched but the OU *Groups* located below, too.

If the option *Recursive search* has not been activated, only the OU *Agents* is searched.

In most cases, it is advisable to activate the option *Recursive search*.

#### Search page by page

Some [LDAP](#) systems (e. g. LDAP AD) only issue a limited amount of data for each search query, e. g. 1000. As a result, the import would not read out more than 1000 users from the LDAP AD, even though there may be additional user data. To read out all data, the option *Search page by page* must be activated. That way, search queries are continued to be sent to the LDAP AD until the system does not deliver any corresponding data anymore.

#### Object class:

Here, you can select which objects are supposed to be imported from the [LDAP](#) system.

*Example:* The LDAP AD contains users of the object type *user*, i. e. *user* must be entered here.

#### Other filters:

You can enter additional filters to refine the search query. It is important to enter filters that the [LDAP](#) system can process. Defining an additional filter makes sense if the indicated root node contains substantially more data than users are required. If an LDAP-OU contains 10,000 users but only 20 agents are required, it does not make sense to request all 10,000 users and subsequently sort them out.

*Example for a simple attribute filter:*

`memberof=CN=PhoneAgents,OU=Groups,OU=AGENTS,DC=asc-sb,DC=lan`

This filter ensures that only those users or objects are requested from the [LDAP](#) that have the value `CN=PhoneAgents,OU=Groups,OU=AGENTS,DC=asc-sb,DC=lan` as [LDAP](#) attribute *memberof*. Only users are requested who are member of the [LDAP](#) group *PhoneAgents*.

*Example for a more complex "or" filter:*

`|(memberof=CN=PhoneAgents,OU=Groups,OU=AGENTS,DC=asc-sb,DC=lan)(memberof=CN=VideoAgents,OU=Groups,OU=AGENTS,DC=asc-sb,DC=lan)`

[LDAP](#) interprets this as a filter to only deliver users or objects that are either members of the [LDAP](#) group *PhoneAgents* or of the group *VideoAgents* or both.



The [LDAP](#) connection data are configured and activated in the Tenants module, see administration manual *System Configuration - User management*.

## 6.1

### Create import source


You have to create an import source for each import format that you would like to use.



An import source is always created for a certain import format which cannot be changed any more later on.

1. Click on the icon  (*Create New Import Source*) in the main view.

⇒ The available formats appear in the context menu.

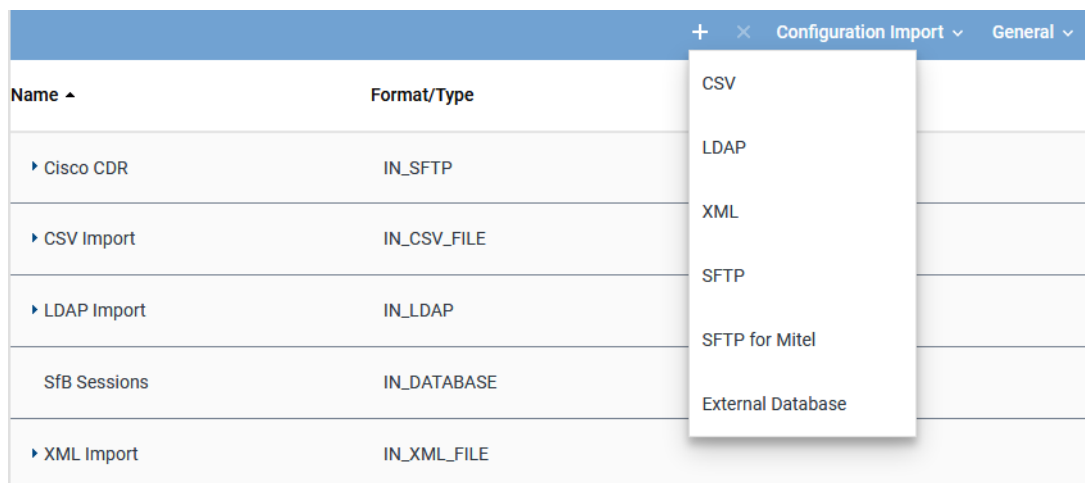

Name ▲	Format/Type
▶ Cisco CDR	IN_SFTP
▶ CSV Import	IN_CSV_FILE
▶ LDAP Import	IN_LDAP
SfB Sessions	IN_DATABASE
▶ XML Import	IN_XML_FILE

+ × Configuration Import ▾ General ▾  
CSV  
LDAP  
XML  
SFTP  
SFTP for Mitel  
External Database

Fig. 20: Create import source

The following import formats are available for the import of user data:

- **XML**  
For these import sources, the drive from which you would like to import the configuration data must have been configured in the recording system. The drive is set up by your system provider. If no appropriate drive is available, contact your system provider.
- **CSV**  
For these import sources, the drive from which you would like to import the configuration data must have been configured in the recording system. The drive is set up by your system provider. If no appropriate drive is available, contact your system provider.
- **LDAP**  
For this import source, the [LDAP](#) connection data in the Tenants module must have been configured and activated, see administration manual *User management*.
- **Web Service**  
For this import source, the function *Web Service* must have been activated by the system provider. If the format is not available, contact your system provider.  
For the import from the Web Service Client Teleopti, the Teleopti interface must have been configured and activated, see administration manual for tenants *Configuration Teleopti interface*.

## 6.2

### Edit import source

1. In the main view, select the import source you would like to edit.  
⇒ All settings for the selected import source are displayed in the detail view.
2. Adjust all necessary settings in the detail view, see [chapter "Create import source", p. 9](#).

3. To save the settings, click on the button *Save*.  
To reset all settings or changes in the tab, click on the button *Reset*.  
To cancel the editing of the import source, click on the main view and confirm the security prompt.

### 6.3 Create import job

- ✓ An import source exists for the format of the data to be imported.
  - ✓ An XSLT file exists for the format of the data to be imported.
1. In the main view, select the import source from which you would like to import the data.
  2. Click on the menu item *Configuration Import > Create New Import Configuration* in the toolbar of the main view.  
⇒ In the detail view, you can enter the data for the new import job.
  3. Adjust all necessary settings in the tabs, see [chapter "Create import configuration", p. 11](#).  
You can change tabs without buffering. The settings are not lost.
  4. To save the settings, click on the button *Save*.  
To reset all settings or changes in all tabs, click on the button *Reset*.  
To cancel the editing of the job configuration, click on the main view and confirm the security prompt.
- ⇒ Upon saving the settings, the import job is displayed within the tree structure of the main view below the selected import source.

### 6.4 Edit import job



You can edit the configuration of an import job any time. The changes become active upon starting the job again. When you change a job configuration while the job is active, the job will first be concluded according to the previous configuration.



For information about the status of a job refer to the Jobs module in the application System Monitoring, see user manual *Usage System Monitoring*.

1. In the main view, select the import job that you would like to edit.  
⇒ The detail view displays all settings of the import job.
2. Adjust all necessary settings in the tabs of the detail view.  
You can change tabs without buffering. The settings are not lost.
3. To save the settings, click on the button *Save*.  
To reset all settings or changes in all tabs, click on the button *Reset*.  
To cancel the editing of the job configuration, click on the main view and confirm the security prompt.

#### See also

- 📄 [Create import configuration](#) [▶ 11]

### 6.5 Start and stop import job

Every import job is automatically started at the point in time defined in the schedule.

In addition, you can start an import job manually if it has been finished or paused (e. g. as for the execution options *interval* or *series*).

To start an import job manually, proceed as follows:

1. Select the import job in the main view.
2. Click on the menu item *Configuration Import* in the toolbar.
3. Click on the menu item *Start Job* in the context menu.

⇒ The import job is started immediately.

As long as an import job is active, the recording system checks whether new files are available in the import source. If new files are available, they are imported.

An import job ends automatically as soon as all corresponding data has been imported or when a stop criterion occurs. You cannot finish or cancel an import job manually.

---

If an import job fails, you are informed about this at the following locations in the system:

- In the application Portal, you receive a respective notification if the generation of such a notification has been activated in the Notifications module of the application System Configuration, see administration manual *System Configuration Notifications module*.



In the application System Monitoring, you receive information about the job status in the Jobs module, see *User manual System Monitoring*.

If the failed job is a job of the execution type *Once*, you have to initiate the job manually once again, after eliminating the underlying cause for the failure. Otherwise the job is not executed again.

---



### 7 Following the job execution

Once the import job has been executed, check the current status.

✓ The import job has been configured and started successfully.

1. Start the application System Monitoring.

2. Click on the module *Jobs*.

3. In the tab *Execution*, click on the button *History*.

⇒ The window *Executions* appears.

4. In the table column *Status Report* check whether data has been imported and whether the number is correct or whether there have been errors during the execution of the job.



For further information see [chapter "Known problems and solutions", p. 31](#).



Basic information about using the application System Monitoring can be found in the user manual for administrators *System Monitoring*.

## 8 XSLT - Purpose and structure

### 8.1 What is the XSLT file required for?

The [XSLT](#) file serves as an interface between an external data source and Neo. By using this technique, data with almost any structure can be converted into a format which can be processed by Neo if certain basic conditions are given. Internally, the [XSLT](#) file is used to build a structure from the information delivered by the data source (e.g. [LDAP](#), [CSV](#) or [XML](#) that complies with the Neo data model. As data sources and the individual requirements may differ, the [XSLT](#) file must be adjusted correspondingly for each import. A default [XSLT](#) file would fall short of the requirements.

### 8.2 Management of the XSLT file

System Configuration offers the module *XSLT Editor* to manage all [XSLT](#) files deployed in the system. New [XSLT](#) files can be created there and existing ones can be imported. Only [XSLT](#) files displayed in this module are available to the current tenant. [XSLT](#) files which have already mapped to import configuration cannot be changed.



For further information about the *XSLT Editor* refer to the administration manual *System Configuration - XSLT management*.

### 8.3 Structure of the XSLT file

In general, [XSLT](#) files are a compilation of attributes and conditions. What is supposed to be mapped to whom. The column *FirstName* in the [CSV](#) file, for instance, corresponds to the attribute *LastName* in Neo. This is depicted in the [XSLT](#) file as follows:

```
<LastName><xsl:value-of select="Zuname"/></LastName>
```

The value behind *value-of select=...* exactly corresponds to the required column name in the [CSV](#) file, i. e. the name of the attribute in the [LDAP](#). The tag `<LastName>...</LastName>` corresponds to the attribute mapped in Neo. The list of tags supported by Neo has been predefined and cannot be changed. They are case-sensitive



In the [LDAP](#), attribute names are assessed lower case; i. e. even if *memberOf* is displayed in an [LDAP](#) AD browser, the [XSLT](#) file must say *memberof*.

This scheme always remains the same but can be extended and refined as required by adding any number of conditions and functions.

#### 8.3.1 Import key

The import key, i. e. the tag `<ImportKey>`, is an attribute that must be mapped unconditionally when importing users. As the data stems from an external source, a value must be defined that identifies it unambiguously so that the data set can be updated during a subsequent import, for example. As a consequence, the import key must be unambiguous for every data set to be imported.

The collection of attributes and conditions is embedded in a framework of the following scheme:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/
Transform">
<xsl:output method="xml" indent="yes" encoding="UTF-8"/>
<xsl:template match="/">
<Employees>
```

```
<xsl:apply-templates/>
</Employees>
</xsl:template>
```

**Caution! For LDAP:** `<xsl:template match="LDAPENTRY">`

**Caution! For CSV/XML files:** `<xsl:template match="Employee">`

```
<Employee>
```

... (the actual content of the XSLT file) ...

```
</Employee>
</xsl:template>
</xsl:stylesheet>
```

### 8.3.2 Enter, delete or ignore attributes

There are three possibilities how attributes can be treated during an import. Depending on how they have been integrated in the [XSLT](#) file, they are either entered, i. e. updated, deleted or ignored.

- If a value has been entered in the tag, the value is applied for the attribute, i. e. either entered as new or updated.

*Example:* `<Role>Agent</Role>`

- If no value has been entered in the tag, a value which may already exist for the employee is deleted.

*Example:* `<Role></Role>`

- If the tag does not exist in the [XSLT](#) file, the attribute is ignored. The existing value of the attribute remains the same for the agents as it was before the import.

### 8.4 Example for conditions and functions in an XSLT file

To list all possible examples would go beyond the scope of this document. The most common conditions and functions are listed in the following:

#### 1. If, then:

```
<Roles>
  <xsl:if test="memberof='Agentunit'">
    <Role>Agent</Role>
  </xsl:if>
  <xsl:if test="memberof='Supervisorunit'">
    <Role>Supervisor</Role>
  </xsl:if>
</Roles>
```

In this case, the system checks whether the data set (user) has the value *Agentunit* or *Supervisorunit* in the column (or in the [LDAP](#) attribute) *memberof*. If this is the case, the user is assigned the role *agent* or *supervisor* in Neo.



The value that is supposed to be assigned in this example, is not read out from the data source dynamically with *value-of select* but firmly set to *agent* or *supervisor*.

#### 2. Either or:

```
<xsl:choose>
  <xsl:when test="telephonenumber != ''">
```

```

        <PBX>Demo</PBX>
        <Extension><xsl:value-of select="telephonenumber"/></
Extension>
    </xsl:when>
    <xsl:otherwise>
        <PBX></PBX>
        <Extension></Extension>
    </xsl:otherwise>
</xsl:choose>

```

This case applies, if the user is only supposed to be assigned a **PBX** (here always the fixed value *Demo*) and extension if the data set contains a value in the column (or **LDAP** attribute) *telephonenumber*. If the column is empty, the user is assigned neither a **PBX** nor an extension.

### 3. Only the last 4 digits of the phone number ...

```

<Extension><xsl:value-of select="substring(telephonenumber, 4)"/></
Extension>

```

In this case, only the last 4 digits from the content of the column (or **LDAP** attribute) *telephonenumber* are entered as extension in Neo. The rest of the phone number is discarded.

### 4. Yes/No:

```

< ReplayAllowed >TRUE</ ReplayAllowed >

```

Attributes which have been configured in Neo by means of check boxes (Yes/No) are displayed in the **XSLT** file by the value *TRUE* (check mark) or *FALSE* (no check mark).

## 8.5

### Default XSLT files

To map external data to the data structures of the Neo system, you need **XSLT** files.

ASC provides different default **XSLT** files some of which you can use directly or otherwise as a template. These **XSLT** files can be found in the following directory:

- *C:\Program Files (x86)\ASC\ASC Product Suite\scripts\resources\XSLT*

### XSLT files for the migration

- *AgentV10ToNeoXSLT.xslt*  
Can be used for the import object type: *employees*  
Purpose of use: import of agent data from a recording server version 10
- *UserV10ToNeoXSLT.xslt*  
Can be used for the import object type: *employees*  
Purpose of use: import of employee data from a recording server version 10

### XSLT files for the import of phone configurations

**NOTICE!** These XSLT files serve as an example only. They have to be adapted to the individual structure of the respective import file.

- *PhoneCloneRegProb.xslt*  
Can be used for the import object type: *phone*  
Purpose of use: import of phone configurations from an XML file which only contains the mandatory fields for a phone configuration.
- *PhoneSimple.xslt*  
Can be used for the import object type: *phone*

Purpose of use: import of phone configurations from an CSV file which only contains the mandatory fields for a phone configuration.

- *IPPhoneWithPhoneNumberInsteadOfExtension.xslt*

Can be used for the import object type: *phone*

Purpose of use: import of phone configurations from an XML file which in addition to the mandatory fields for a phone configuration contains information for the IP phones.

#### Additional XSLT files

- *Identity.xslt*

Can be used for all import object types

Purpose of use: import of data which do not require a conversion

- *Call\_Director\_CUSTOMCP01.xslt*

Can be used for the import object type: *Call Director customer survey*

Purpose of use: import of results of Call Director customer surveys

**NOTICE!** This XSLT file serves as a template example only. It has to be adjusted individually for each Call Director customer survey, see Call Director customer surveys.

- *XSLTForLDAP\_ActiveDirectory.xslt*

Can be used for the import object type: *employees*

Purpose of use: import of employee data from an Active Directory via LDAP

**NOTICE!** This XSLT file serves as a template example only. It has to be adjusted to meet the customer-specific structure of the Active Directory.

- *XSLTForLDAP\_ActiveDirectory\_Orga\_Unit.xslt*

Can be used for the import object type: *organization structures*

Purpose of use: import of organization structures from an Active Directory via [LDAP](#)

**NOTICE!** This XSLT file serves as a template example only. It has to be adjusted to meet the customer-specific structure of the Active Directory.

#### XSLT files for the import with the Web Service client of Teleopti

- *XSLT\_For\_Employee\_Import\_Teleopti.xslt*

Can be used for the import object type: *employees*

Purpose of use: importing employees and their agent data

- *XSLT\_For\_Skill\_Import\_Teleopti.xslt*

Can be used for the import object type: *agent skills*

Purpose of use: importing the skills of agents of the provider Teleopti

#### XSLT files for the import for the Recording Check Mechanism

- *Cisco.xslt*

Can be used for the import object type: *Cisco CDR data*

Purpose: Import of Cisco CDR log files to compare the conducted conversations with the saved recordings.

- *SfB.xslt*

Can be used for the import object type: *SfB session data*

Purpose: Import of SfB session data to compare the conducted conversations with the saved recordings.



Upon request, ASC provides you with support in adjusting the [XSLT](#) templates or with additional [XSLT](#) files appropriate for your individual data structures.



For information about the XSLT Management module refer to the administration manual *XSLT management*.

## 9 Known problems and solutions

The following chapter describes common problems and questions and offers approaches for solutions.

### 9.1 The import job has been started but nothing happens.

- Check whether the job has actually been executed. In System Monitoring in the module *Jobs*, you can view the status of the respective job.
- In case of an [CSV/XML](#) import, check whether the source file could be read. If the source file could be read, it has been removed from the subdirectory in which it had been saved. If the source file remains in this subfolder, check whether the directory has been released for the service *Fileman*.
- In case of an [LDAP](#) import, check whether the [LDAP](#) connection that has been saved for the tenant is valid and whether it has access to the required data in the [LDAP](#).

### 9.2 The import job starts but the status report shows an error message.

- In this case, it is possible that there are problems with the data source or the deployed [XSLT](#) file. Check the [XSLT](#) file for structural errors. Open the [XSLT](#) file in the browser *Firefox*. It clearly displays general structural errors. If the structure is correct, Firefox displays the [XSLT](#) file in a tree structure.

### 9.3 The import has been carried out but does not render the expected results.

Check the deployed [XSLT](#) file and if required the data source:

- Do the values in the [XSLT](#) file coincide with the [LDAP](#) attributes?
- Are there orthographic mistakes (case-sensitive)?
- Do the conditions make sense?
- Are expected fields missing?
- Is an unambiguous import key assigned?

### 9.4 The LDAP import has been carried out but no users or not all users have been imported.

This can have several causes:

- Go to System Monitoring to check the *execution report* of the import job. Have errors occurred due to missing mandatory fields or because no [PBX](#) has been configured?
- If no relevant data is available in the [LDAP](#) root node indicated in the import configuration, check the root node in the [LDAP](#) system.
- Check whether the [LDAP](#) account which is used for the [LDAP](#) connection in the application System Configuration in the *Tenants module* has access to the required data in the [LDAP](#) system.
- Check the [LDAP](#) connection in the tab *LDAP Connection Data* in the *Tenants module* of the application System Configuration.
- If you are using *other filters* for the import, check whether these filters are used correctly.

### 9.5 The LDAP import has been carried out but took very long and imported too much data.

- To reduce the amount of data, lower the root node in the tab *LDAP* or define a filter under *Other filters* which narrows down the amount of data to be imported.

## 10 Overview of available Neo tags for XSLT files

As the number of user attributes may change from version to version, the following list may differ from the displayed attributes in Neo.

### 10.1 Tags for mandatory fields

<ImportKey> Serves for the unambiguous identification of the employee and must thus be unique.  
 <LastName> Last name of the employee.  
 <FirstName> First name of the employee.

### 10.2 Tags for general employee attributes

<StaffNumber> Employee number.  
 <HireDate> Date when the employee was hired (format: yyyy-dd-MM).  
 <DateOfBirth> Date of birth of the employee (format: yyyy-dd-MM).  
 <EMailAddress> E-mail address of the employee.  
 <Comment> Additional free text.  
 <ReplayViaPhoneAddress> *Replay via phone address* of the employee.  
 <timeZoneID> Time zone of the employee (must coincide with the value from the *Time zone drop-down menu* in Neo).  
 <Address> Aggregative tag for all address attributes.  
     <ZipCode> ZIP code of the employee.  
     <Street> Street of the employee.  
     <Country> Country of the employee.  
     <City> City of the employee.  
 </Address> The *Address* tag must be closed behind the four address information.  
 <TeleoptiEmployeeId> Special application for Teleopti systems.

### 10.3 Tags for the assignment of organization units and roles

<OrgaUnits> Aggregative Tag for the assignment of organization units to employees.  
     <IsMember> Aggregative tag for the members of an organization unit.  
         <OrgaUnitImportKey> Either the import key of the organization unit.  
         <OrgaUnitImportKey> Can appear several time.  
         <OrgaUnitName> Or the name of the organization unit.  
         <OrgaUnitName> Can appear several times.  
     </IsMember>  
     <IsSupervisor> Aggregative tag for the superiors in organization units.  
         <OrgaUnitImportKey> Either the import key of the organization unit.  
         <OrgaUnitImportKey> Can appear several time.  
         <OrgaUnitName> Or the name of the organization unit.  
         <OrgaUnitName> Can appear several times.  
     </IsSupervisor>  
 </OrgaUnits>  
 <Roles> Aggregative tag for roles.



<Role>Name of the role which is supposed to be assigned to the employee.  
</Roles>

#### 10.4 Tags for the agent data of employees

<PBX> Name of the [PBX](#) which is supposed to be assigned to the employee.  
<Extensions> Aggregative tag for the extensions of the employee.  
    <Extension> Extension of the agent.  
    <Extension> Can appear several times.  
</Extensions>  
<PBXAgentIDs> Aggregative tag for the [PBX Agent IDs](#).  
    <PBXAgentID> The [PBX Agent ID](#) of the employee.  
    <PBXAgentID> Can appear several times.  
</PBXAgentIDs>  
<ChatPBX> The chat [PBX](#) of the employee.  
<ChatIDs> Aggregative tag for the chat IDs of the employee.  
    <ChatID> Chat ID of the employee.  
    <ChatID> Can appear several times.  
</ChatIDs>  
<PCName> Name of the employee's computer.  
<PCLogin> Login name of the employee.

#### 10.5 Tags for the employee's account

<LoginName> The login name of the employee must be unambiguous.  
<AuthenticationViaLDAP> TRUE if the agent may login via [LDAP](#).  
<AuthenticationLDAPDN> The [LDAP](#)-DN (distinguished name) of the employee.  
<Password> Password of the employee. If no password is entered, a random password is generated and sent to the employee if they have entered a valid e-mail address.  
<ChangePassword> TRUE if the users password is supposed to be changed upon the next login.  
<PasswordNeverExpires> TRUE if the users password is never supposed to expire.  
<PasswordNoRules> TRUE if the user may ignore the password rules.  
<LockAccount> TRUE if the user's account is supposed to be locked.

#### 10.6 Tags for the employees' general settings

<Superuser> TRUE if the user is supposed to be a superuser.  
<HasAccessToData> TRUE if the user is supposed to have access to all data of the tenant.  
<ReplayAllowed> TRUE if the user may replay recordings.  
<DeleteAllowed> TRUE if the user may delete conversations.  
<CoachingAdvisor> TRUE if the user is supposed to be coaching advisor.

#### 10.7 Tags for the logging settings of employees

<AccessControl> TRUE if logging of access control is supposed to be active for the user.

---

<code>&lt;SearchActivitiesControl&gt;</code>	TRUE if logging of search activities is supposed to be active for the user.
<code>&lt;ReplayActivities&gt;</code>	TRUE if logging of the replay activities is supposed to be active for the user.
<code>&lt;ConfigActivities&gt;</code>	TRUE if logging of the configuration activities is supposed to be active for the user.
<code>&lt;CallNotification&gt;</code>	TRUE if call notification is supposed to be active for the user

## List of figures

Fig. 1	Configuration import - main view .....	7
Fig. 2	Configuration import - toolbar .....	7
Fig. 3	Detail view Configure import source (example) .....	9
Fig. 4	Group field Import Source (example) .....	10
Fig. 5	Group field Connection Data .....	10
Fig. 6	Add drive .....	11
Fig. 7	Detail view Import Configuration (example) .....	11
Fig. 8	Import configuration - tab Details .....	12
Fig. 9	Import configuration - tab Import Options .....	12
Fig. 10	Group field Create and Delete Objects .....	13
Fig. 11	Import configuration - group field Stop Criteria .....	13
Fig. 12	Tab Schedule .....	14
Fig. 13	Tab Schedule - configure group field Period of Time .....	15
Fig. 14	Tab Schedule - configure group field Interval .....	16
Fig. 15	Schedule - Series .....	16
Fig. 16	Configure fixed dates .....	16
Fig. 17	Select dates .....	17
Fig. 18	Configure fixed days .....	17
Fig. 19	Import configuration - tab LDAP .....	18
Fig. 20	Create import source .....	22

---

List of tables

---

## Glossary

### CSV

---

Comma-separated values is a file format which stores tabular data in plain text form.

### DN

---

Distinguished Name; an unambiguous identifier of objects within a hierarchically structured directory which involves the objects located hierarchically above the object it is supposed to identify.

### LDAP

---

Lightweight Directory Access Protocol

### NAS

---

Network Attached Storage is a file-level computer data storage server connected to a computer network providing data access to other devices on the network. NAS is usually used to provide independent storage capacity in a computer network without major effort. (Source: Wikipedia 4th May 2017)

### PBX

---

Private Branch Exchange

### PBX Agent ID

---

ID which has been deposited in the PBX for the agent.

### UUID

---

Universally Unique Identifier is an identifier standard which makes it possible to unambiguously identify information in distributed systems without central coordination.

### XML

---

Extensible Markup Language is a human-readable and machine-readable language which defines a set of rules for encoding documents.

### XSLT

---

XSL Transformation, short XSLT, is a programming language to transform XML documents. XSLT is based on the logical tree structure of an XML document and serves to define transformation rules. XSLT programs, so-called XSLT style sheets, are designed according to the XML standard rules. (Source: Wikipedia 22nd March 2017) The style sheets are read in by dedicated software, the XSLT processors, which transform one or several XML documents into the respective output format based on these instructions.

